







# Measure Sounds Reliably

Sound Level Meter Class1 NL-52 Sound Level Meter Class2 NL-42






(φ2.5 mono jack)

# No paper manual is needed.

User instructions and a help function can be easily accessed on the device.



Measurement Display (Level-Time graph)



Measurement Display (Simultaneous display of Main and Sub channel)



Parameter Screen



Menu screen



Help screen

# Water-resistant (Except for the microphone)

Guaranteed water-resistant to at least level IP54 (resistant to spraying water). Helps reduce failures caused by sudden rain showers.



# Use of rechargeable batteries

In these new models it is possible to use rechargeable batteries which make these meters environmentally-friendly. 24 hour continuous measurement is possible (when using eneloop® or dry alkaline batteries).



- · Please use the dedicated charger to charged eneloop® batteries.
- When using eneloop batteries, please read the eneloop® battery instruction manual
   eneloop® is a registered trademark of Panasonic group.

## Continuous detailed measurements for one month

This meter can be used to conduct long-term measurements, such as environmental measurements.

(If an AC adapter is used)

NL-52/42 •

1000 h (approx. one month)

Previous model

Duration of recording

= 200 h (approx. one week)

Example of detailed recording


If the  $L_p$  is measured at 100 ms intervals and the  $L_{\rm eq}$  is simultaneously measured at 10 min intervals over a 24 h period, the total size of accumulated data is approximately 74 MB (reference value)

## Functionality can be extended by a range of options


Additional functions can be added, such as simultaneous logging of raw data (100 ms  $L_p$ ) and processed data(Leg and other indices), frequency analysis reverberation time measurement and long-term data recording.



1/3 octave band analysis screen



FFT analysis screen (x40)



Data management screen of AS-60 software


## **Optional program function list**

When the optional programs are installed, the following functions are added:



The NX-42EX is supplied on the 512 MB SD card. The 512 MB SD card can be used as a memory card after installing the program.


# NX-42EX Auto store function (instantaneous value, processed value) Comparator function Continuous data output function



#### Auto store function


This function enables continuous measurement in  $L_P$  mode (instantaneous SPL) and  $L_{\text{eq}}$  mode (equivalent continuous SPL) to be conducted simultaneously.

Lp mode (instantaneous SPL) and Leq mode (equivalent continuous SPL) concept

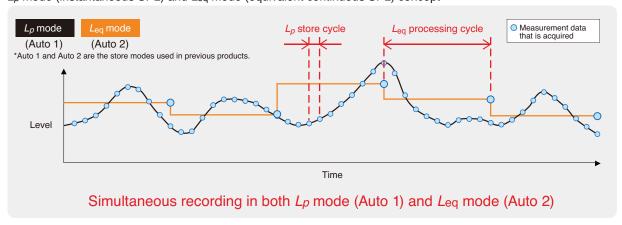

#### Comparator function

This function turns on when the open collector output exceeds the set value (max. applied voltage 24 V, max. current 60 mA, allowable dissipation 300 mW).

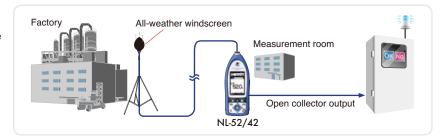

#### ■ Continuous data output function

This function enables the continuous acquisition of instantaneous values and processed values during both USB and RS-232C communication.

This is a convenient function for users who can design their own control programs, where data has to be transferred continuously from the sound level meter to the computer.

<sup>\*</sup>The NX-42EX program cannot be uninstalled.

#### **Waveform recording** program NX-42WR



This function enables users to record sounds and to process sound levels simultaneously. Recorded data can be played on computer and used for frequency analysis.

(Uncompressed waveform WAVE file)

Sampling at 48 kHz, 24 kHz, 12 kHz, Selection of 24 bit or 16 bit

Maximum recording time (16 bit)

Memory card Sampling frequency	512 MB	2 GB
48 kHz	1 h	4 h
24 kHz	2 h	8 h
12 kHz	4 h	16 h

The NX-42WR is supplied on the 2 GB SD card. The 2 GB SD card can be used as a memory card after installing the program.

#### Octave, 1/3 octave real-time analysis program NX-42RT



The NX-42RT is supplied on the 512 MB SD card. The 512 MB SD card can be used as a memory card after installing the program.




By adding the NX-42RT program to the NL-52/NL-42, octave band and 1/3 octave band analysis can be performed. Saved analysis results can be loaded and shown in an overlay graph display together with current analysis data. NC curve graph display and NC value calculation/display are also possible. Using the AS-60RT software, data can be utilized and managed on a computer.

By adding the NX-42RV program to the NL-52/42, reverberation time measurements


This program allows storage of reverberation time decay curves, T20/T30 calculation,

Txx calculation (reverberation time calculation based on a user-defined interval) and


can be performed. The measurement method is the interrupted noise method.




1/3 octave band analysis screen



Overlay analysis screen



NC curve screen



Partial over all screen



Measurement screen (Level-Time graph)


#### **Reverberation Time** Measurement **Program** NX-42RV




The NX-42RV is supplied on the 512 MB SD card. The 512 MB SD card can be used as a memory card after installing the program.



Measuring screen (graph)



Measuring screen (numeric)



Reverberation time decay curve screen



Result screen

#### **FFT analysis** program NX-42FT




The NX-42FT is supplied on the 512 MB SD card. The 512 MB SD card can be used as a memory card after installing the program.




By adding the NX-42FT program to the NL-52/NL-42, FFT analysis can be performed. The analysis frequency range is 20 kHz, with 8 000 spectrum lines (200 displayed). Saved analysis results can be loaded and shown in an overlay graph display together with current analysis data. Maximum zoom ratio is x40, and the top list screen can show up to 20 lines.



INST (Z)





96.9 df



Analysis screen (x1)


Analysis screen (x40)

Overlay analysis

Linear average

Top list screen

#### **System construction**

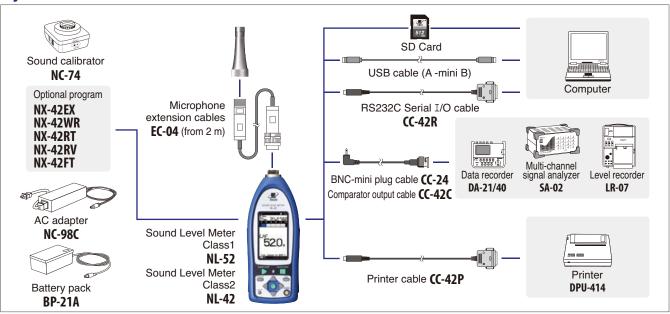

#### **Peripheral devices**

# All-weather windscreen WS-15



This windscreen is designed for outdoor installations. It helps to reduce wind noise and is equipped with rainproof features that satisfy the IPX3 water-resistant specifications. It is used with a microphone extension cable.

(Mounting adapter WS15006 required separately)

# Rain-protection windscreen WS-16



This screen protects the microphone against rain for a short period of time.
The rainproof performance of this windscreen is designed to satisfy the IPX3 water-resistant specifications.

# Sound calibrator NC-74



This Sound calibrator conforms to IEC 60942 (JIS C 1515), Class 1, providing a level of performance sufficient for calibrating the precision sound level meter.

Specifications
Nominal acoustic pressure level 94 dB
Nominal frequency 1 kHz

#### Tripod

This stand can be used for general acoustic measurements. The sound level meter and microphone can be mounted on the stand.




(For All-weather windscreen WS-15, use of ST-81 is recommended.)

# Waveform analysis software AS-70

This software allows you to load stored WAVE files from a RION sound level meter, vibration meter or data recorder. Octave, 1/3 octave, and FFT analyses can then be performed. Playback of the real sound files is also possible.

Specifications		
Waveform analysis	Calculations	Maximum value, Minimum value, Average value, RMS, Variance,
		Differential and integral calculus, HPF, LPF
Frequency weighting	ng	Z, A, C, G, C to A, L <sub>v</sub> (vertical) (JIS C 1510), L <sub>v</sub> (horizontal) (JIS C 1510)
FFT analysis	Analysis points	32 to 65 536 points
	Display data	Power spectrum, Power spectral density, Spectrogram
Time weighting	•	10 ms, F, 630 ms, S, 10 s
Octave band	Applicable standards	IEC 61260 Class 1 (JIS C 1514 Class 1)
analysis	Analysis frequency	Octave band 0.5 Hz to 16 kHz (16 bands)
	range	1/3 octave hand 0.4 Hz to 20 kHz (48 hands)

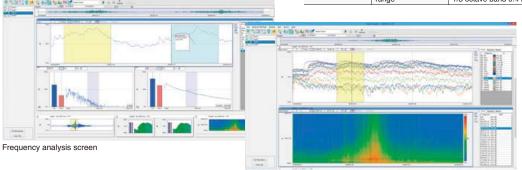

Frequency analysis screen

CPU	Intel Core™2 Duo 2 GHz or
	higher
RAM	2 GB or more
	(4 GB recommended)
HDD	20 GB free or more
	(100 GB or more recommended)
DISPLAY	XGA (1 024 × 768) or more
OS	Microsoft Windows XP
	Professional 32 bit,

Recommended computer specifications

7 Professional 32 bit / 64 bit, 8.1 Pro 32 bit/64 bit

## Complete software for environmental measurements


### Data management software for environmental measurement AS-60

Data management software for environmental measurement AS-60 enables the graph display of measurement data, arithmetic processing, excluded sound processing, preparation of reports, output of files, and playback of real sound files.

- Reports easy to prepare
- data items (up to 8 data items)
- Simultaneous display of multiple Data stored in a data recorder can Data combination be loaded (CSV file for DA-40 Viewer)

trial version now available on

our website

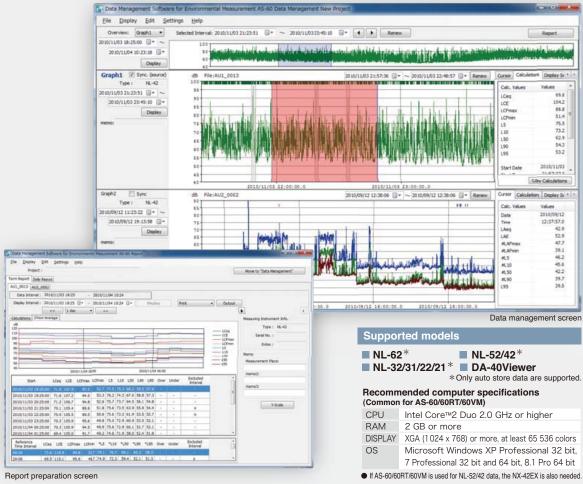

#### Data management software for environmental measurement AS-60RT (Includes the octave and 1/3 octave data management software)



#### Adds support for handling octave band analysis data to AS-60

AS-60RT is for managing NX-62RT/42RT or NA-28 data on a computer.



Data management software for environmental measurement AS-60VM (Includes the vibration level data management software)

Adds support for handling data measured with VM-55EX/53A to AS-60

Supported models ■ VM-55EX\* ■ VM-53A\* \*Only auto store data are supported.

	Specifications	     	
		NL-52	NL-42
	Applicable standards	IEC 61672-1: 2013 Class 1	IEC 61672-1: 2013 Class 2
1		ANSI S1.4-2014 Class 1	ANSI S1.4-2014 Class 2
1		JIS C 1509-1: 2005 Class 1	JIS C 1509-1: 2005 Class 2
1		CE Marking (EMC Directive 2004/108	3/EC, 2014/30/EU,
1		Low Voltage Directive 2006/95/EC, 20	014/35/EU),
1		WEEE Directives, Chinese RoHS (ex	port model for China only)
ſ	Measurement functions	Simultaneous measurement of the following	llowing items, with selected time
1		weighting and frequency weighting	
1	Processing (main ch)	Instantaneous sound pressure level:	Lp
1		Equivalent continuous sound pressure	e level: L <sub>eq</sub>
1		Sound exposure level: L <sub>E</sub>	
1		Maximum sound pressure level: Lmax	
1		Minimum sound pressure level: Lmin	
1		Percentile sound levels: L <sub>N</sub> (0.1 to 99.9	%, 0.1-increment steps, max. 5 value

	eci			520.		420.
			NL-52	<b>₩</b>	NL-42	CX
Appli	cable	e standards	IEC 61672-1: 20	13 Class 1	IEC 61672-1: 2013	Class 2
	ANSI S1.4-2014 Class 1			Class 1	ANSI S1.4-2014 CI	ass 2
			JIS C 1509-1: 20	005 Class 1	JIS C 1509-1: 2005	Class 2
			CE Marking (EMC Directive 2004/108/EC, 2014/30/EU,			
			Low Voltage Directive 2006/95/EC, 2014/35/EU),			
			WEEE Directives, Chinese RoHS (export model for China only)			
Meas	uren	nent functions				elected time
			weighting and frequency weighting			
Pr	oces	sing (main ch)	Instantaneous s	ound pressure level: L	-p	
			Equivalent conti	nuous sound pressure	e level: Leq	
			Sound exposure	e level: LE		
			Maximum sound	pressure level: Lmax		
			Minimum sound	pressure level: L <sub>min</sub>		
			Percentile sound	levels: L <sub>N</sub> (0.1 to 99.9	%, 0.1-increment ste	ps, max. 5 values)
Pr	oces	sing (sub ch)		ound pressure level: L		,
_		nal processing		ain processing items,		can be selected
			for simultaneous		<b>.</b>	
				ivalent continuous sou	and level: Log	
				k sound level: L <sub>Cpeak</sub>		
			-	sound level: Lzpeak		
				equivalent continuous so	ound level: Laran*2	
				weighted equivalent cor		LATmay*2
				ge of the maximum leve		I
				iting for the additional proce		I
				so when the sub-channel ha		
				(Z-weighting ) is selected,		I
			(L <sub>Zpeak</sub> ) are selecta	:	trie additional processii	ig Leed at it Lepeak
Micron	hono	Туре	UC-59	bie.	UC-52	
Iviioiop	110110	Sensitivity level			-33 dB	
Moas	uron	nent range	A-weighting: 25	dB to 138 dB	00 UD	
IVICAS	uici	nent range	C-weighting: 33			
			Z-weighting: 38			
					to 141 dD	
				k sound level: 55 dB t		
Inher	ont	A-weighting	17 dB or less	k sound level: 60 dB t		
					19 dB or less	
noise		C-weighting	25 dB or less 30 dB or less		27 dB or less 32 dB or less	
From:		Z-weighting y range				
	ienc		10 Hz to 20 kHz		20 Hz to 8 kHz	
			A, C, and Z			
		y weighting		Clow)		
	weig	ghting	F (Fast) and S (			
Level	weig rang	ghting ge	F (Fast) and S ( Single range (Li	nearity range: 113 dB)	)	
Level	weig rang r grap	ghting ge sh display range max	F (Fast) and S (Single range (Line Max. 110 dB (20	nearity range: 113 dB) to 130 dB)		
Level Ba Sw	weig rang r grap itching	ghting ge sh display range max g of bar graph display	F (Fast) and S ( Single range (Li Max. 110 dB (20 Set the upper/ lo	nearity range: 113 dB) to 130 dB) ower limit in 10 dB inco		
Ba Sw RMS	rang rang r grap itching dete	ghting ge sh display range max g of bar graph display ection circuit	F (Fast) and S ( Single range (Li Max. 110 dB (20 Set the upper/ lo Digital processin	nearity range: 113 dB) 0 to 130 dB) ower limit in 10 dB incoming method	rements.	
Ba Sw RMS	rang rang r grap itching dete	ghting ge sh display range max g of bar graph display	F (Fast) and S ( Single range (Li Max. 110 dB (20 Set the upper/ lc Digital processir 20.8 µs (Lp, Leq,	nearity range: 113 dB) to 130 dB) ower limit in 10 dB inco	rements.	r: 48 kHz)
Ba Sw RMS Samp	rang r grap itching dete	ghting ge sh display range max g of bar graph display ection circuit cycle	F (Fast) and S ( Single range (Li Max. 110 dB (20 Set the upper/ lc Digital processin $20.8 \mu\text{s}  (L_P, L_{\text{eq}}, 100 \text{ms}  (L_N)$	nearity range: 113 dB) 0 to 130 dB) ower limit in 10 dB incoming method LE, Lmax, Lmin, Lpeak	rements.	
Ba Sw RMS	rang r grap itching dete	ghting ge sh display range max g of bar graph display ection circuit cycle	F (Fast) and S ( Single range (Li Max. 110 dB (20 Set the upper/ lo Digital processir 20.8 µS (L <sub>P</sub> , L <sub>eq</sub> , 100 ms (L <sub>N</sub> )	nearity range: 113 dB) to 130 dB) over limit in 10 dB income g method LE, Lmax, Lmin, Lpeak:	rements.  sampling frequency	standards, using
Ba Sw RMS Samp	rang r grap itching dete oling ratio	ghting ge sh display range max g of bar graph display ection circuit cycle	F (Fast) and S ( Single range (Li Max. 110 dB (20 Set the upper/ lo Digital processir 20.8 \( \mu S \) (L\( \rho \), L\( \rho \), 100 ms (L\( \rho \)) Electrical calibra internally genera	nearity range: 113 dB) to 130 dB) twer limit in 10 dB income to method  LE, Lmax, Lmin, Lpeak: ation performed accorated signals: acoustic	rements.  sampling frequency	standards, using
Ba Sw RMS Samp	rang r grap itching dete oling ratio	ghting ge sh display range max g of bar graph display ection circuit cycle	F (Fast) and S ( Single range (Li Max. 110 dB (20 Set the upper/ lc Digital procession 20.8 \( \mu \) S(L_p, Leq, 100 ms (L_N) Electrical calibra internally genera Windscreen corr	nearity range: 113 dB) to 130 dB)	rements.  sampling frequency ding to IEC and JIS calibration performe	s standards, using d with the NC-74.
Ba Sw RMS Samp	rang r grap itching dete oling ratio	ghting ge sh display range max g of bar graph display ection circuit cycle	F (Fast) and S ( Single range (Li Max. 110 dB (20 Set the upper/ Ic Digital processin 20.8 µs (Lp, Leq. 100 ms (Ln) Electrical calibra internally genera Windscreen cor Compliant with IEC	nearity range: 113 dB) 10 to 130 dB) 10 to 130 dB) 10 to 130 dB) 10 to 130 dB) 11 to 140 dB 12 to 130 dB) 12 to 130 dB) 13 to 130 dB) 14 to 130 dB) 15 to 130 dB) 16 to 130 dB) 16 to 130 dB) 16 to 130 dB) 16 to 130 dB) 17 to 130 dB) 18 to 130 dB) 19 to 13	rements.  sampling frequency ding to IEC and JIS calibration performe	s standards, using d with the NC-74.
Ba Sw RMS Samp	rang r grap itching dete oling ratio	ghting ge sh display range max g of bar graph display ection circuit cycle	F (Fast) and S ( Single range (Li Max. 110 dB (2C Set the upper/ Ic Digital processir 20.8 µs (Lp, Leq. 100 ms (L <sub>N</sub> ) Electrical calibra internally genera Windscreen cor Compliant with IEC Diffuse sound file	nearity range: 113 dB) 1 to 130 dB) 1 to 130 dB) 1 wer limit in 10 dB inci 1g method 1 E, Lmax, Lmin, Lpeak: 1 ation performed accor 1 ated signals: acoustic 1 rection: 1 61672-1 and JIS C 1509- 2 ated correction:	rements.  sampling frequency ding to IEC and JIS calibration performe	s standards, using d with the NC-74.
Ba Sw RMS Samp	rang r grap itching dete oling ratio	ghting ge sh display range max g of bar graph display ection circuit cycle	F (Fast) and S ( Single range (Li Max. 110 dB (2C Set the upper/ Li Digital processir 20.8 µs (Lp, Leq, 100 ms (L <sub>N</sub> ) Electrical calibra internally genera Windscreen cor Compliant with IEC Diffuse sound fic	nearity range: 113 dB) to 130 dB) to 130 dB) over limit in 10 dB incident in 10 dB i	rements.  sampling frequency ding to IEC and JIS calibration performe	s standards, using d with the NC-74.
RMS Samp Calib	weig rang r grap dete dete bling ratio	ghting ge in display range max g of bar graph display settion circuit cycle n	F (Fast) and S ( Single range (Li Max. 110 dB (2C Set the upper/ lo Digital processin 20.8 µs (Lp, Leq, 100 ms (L <sub>N</sub> ) Electrical calibra internally genera Windscreen com Compliant with IEC Diffuse sound fit Correction of fri (ANSI S1.4) in d	nearity range: 113 dB) 10 to 130 dB) 10 to 130 dB) 10 to 130 dB) 10 met limit in 10 dB income 10 method 10 method 11 method 12 method 13 method 14 method 15 method 16 method 16 method 17 method 18 method 18 method 18 method 18 method 19 method 10	rements.  It sampling frequency rding to IEC and JIS calibration performe 1 standards when the w cs in order to comp	5 standards, using d with the NC-74. indscreen is installed.
Ba Sw RMS Samp	weig rang r grap dete dete bling ratio	ghting ge in display range max g of bar graph display settion circuit cycle n	F (Fast) and S ( Single range (Li Max. 110 dB (2C Set the upper/ lc Digital processin 20.8 µs (Lp, Leq. 100 ms (Lp) Electrical calibre internally genera Windscreen cort Compliant with IEC Diffuse sound file (ANSI S1.4) in d The meter can bu	nearity range: 113 dB) 10 to 130 dB) 20 to 130 dB) 21 to 130 dB) 22 to 130 dB) 23 to 130 dB) 24 to 130 dB) 25 to 130 dB) 26 to 130 dB) 26 to 130 dB) 27 to 130 dB) 28 to 130 dB) 28 to 130 dB) 29 to 130 dB) 29 to 130 dB) 20 to 1	rements.  sampling frequency ding to IEC and JIS calibration performe 1 standards when the w cs in order to comp g a specified time (OF	s standards, using d with the NC-74. indscreen is installed. bly with standards (F, 1, 3, 5 or 10 s)
RMS Samp Calib	weig rang r grap dete dete bling ratio	ghting ge in display range max g of bar graph display settion circuit cycle n	F (Fast) and S ( Single range (Li Max. 110 dB (2C Set the upper/ lc Digital processi 20.8 µs (Lp, Leq, 100 ms (Ln) Electrical calibra internally genera Windscreen corr Compliant with IEC Diffuse sound file Correction of fr (ANSI S1.4) in d The meter can bafter the start but	nearity range: 113 dB) to 130 dB) were limit in 10 dB inci- g method  LE, Lmax, Lmin, Lpeak: ation performed accor- ated signals: acoustic rection: 61672-1 and JIS C 1509- adequency characteristic iffuse sound field. es et to start measuring ton has been pressed	rements.  sampling frequency rding to IEC and JIS calibration performe 1 standards when the w cs in order to comp g a specified time (OF or when a user-set tr	s standards, using d with the NC-74. indscreen is installed. bly with standards F, 1, 3, 5 or 10 s) igger is exceeded.
RMS Samp Calib Corre	weigi rang r grapp itching dete bling ratio	ghting ge in display range max g of bar graph display settion circuit cycle n	F (Fast) and S ( Single range (Li Max. 110 dB (20 Set the upper/ Ic Digital processin 20.8 µs (Lp, Leq. 100 ms (Ln) Electrical calibra internally genera Windscreen cor Compliant with IEC Diffuse sound fir (ANSI \$1.4) in c The meter can be after the start bul When the PAUS	nearity range: 113 dB) to 130 dB) were limit in 10 dB income generated accordance accord	rements.  sampling frequency rding to IEC and JIS calibration performe 1 standards when the w cs in order to comp g a specified time (OF or when a user-set tr ause measurement,	s standards, using d with the NC-74. indscreen is installed. bly with standards iF, 1, 3, 5 or 10 s) igger is exceeded. the preceding
Level Ba Sw RMS Samp Calib Correct Delay	weigrang rang r grap itching dete dete dete dete dete dete dete ratio	ghting ge th display range max g of bar graph display bection circuit cycle n n functions	F (Fast) and S ( Single range (Li Max. 110 dB (2C Set the upper/ Li Digital processir 20.8 µs (Lp, Leq. 100 ms (L <sub>N</sub> ) Electrical calibra internally genera Windscreen cor Compliant with IEC Diffuse sound fic Correction of fr (ANSI S1.4) in d The meter can bu When the PAUS (user selectable	nearity range: 113 dB) 10 to 130 dB) 10 to 130 dB) 10 to 130 dB) 10 to 130 dB) 11 to 130 dB) 12 to 130 dB) 13 to 130 dB) 14 to 130 dB) 15 to 130 dB) 16 to 130 dB) 16 to 130 dB) 17 to 130 dB) 18 to 130 dB) 18 to 130 dB) 18 to 130 dB) 19 to 1	rements.  sampling frequency ding to IEC and JIS calibration performe  1 standards when the w cs in order to comp g a specified time (OF or when a user-set tr ause measurement, e excluded from pro	s standards, using d with the NC-74. indscreen is installed. bly with standards if, 1, 3, 5 or 10 s) igger is exceeded, the preceding cessing.
RMS Samp Calib Corre	weigrang rang r grap itching dete dete dete dete dete dete dete ratio	ghting ge th display range max g of bar graph display bection circuit cycle n n functions	F (Fast) and S ( Single range (Li Max. 110 dB (2C Set the upper/ Li Digital processir 20.8 µs (Lp, Leq, 100 ms (L,n) Electrical calibra internally genera Windscreen cor Compliant with IEC Diffuse sound fit Correction of fr (ANSI S1.4) in d The meter can bu When the PAUS (user selectable Backlit semitran	nearity range: 113 dB) 10 to 130 dB) 11 to 130 dB 11 to 130 dB 11 to 130 dB 12 to 130 dB 13 to 130 dB 14 to 130 dB 15 to 130 dB 16 to 130 dB 16 to 130 dB 17 to 130 dB 18	rements.  sampling frequency ding to IEC and JIS calibration performe  1 standards when the w cs in order to comp g a specified time (OF or when a user-set tr ause measurement, e excluded from pro D display WQVGA (4	s standards, using d with the NC-74. indscreen is installed. bly with standards if, 1, 3, 5 or 10 s) igger is exceeded, the preceding cessing.
Level Ba Sw RMS Samp Calib Correct Delay	weigrang rang r grap itching dete dete dete dete dete dete dete ratio	ghting ge th display range max g of bar graph display bection circuit cycle n n functions	F (Fast) and S ( Single range (Li Max. 110 dB (2C Set the upper/Li Set the upper/Li Digital processir 20.8 \( \mu \) \( \mu \) \( \mu \) \( \mu \) Electrical calibra internally genera Windscreen con Compliant with IEC Diffuse sound fit Correction of fr (ANSI S1.4) in of The meter can be after the start but When the PAUS User Selectable Backlit semitran *LCD with touc	nearity range: 113 dB) 10 to 130 dB) 11 to 130 dB) 12 to 130 dB) 13 to 130 dB) 14 to 130 dB) 15 to 130 dB) 16 to 130 dB) 17 to 130 dB) 18 to 130 dB) 18 to 130 dB) 19 to 1	rements.  It sampling frequency Iding to IEC and JIS calibration performe It standards when the w cs in order to comp g a specified time (OF or when a user-set tr ause measurement, e excluded from pro D display WQVGA (4 buch Panel)	s standards, using d with the NC-74. indscreen is installed. bly with standards if, 1, 3, 5 or 10 s) igger is exceeded, the preceding cessing.
Level Ba Sw RMS Samp Calib Correct Delay	weigrang rang r grap itching dete dete dete dete dete dete dete ratio	ghting ge th display range max g of bar graph display bection circuit cycle n n functions	F (Fast) and S ( Single range (Li Max. 110 dB (2C Set the upper/Li Set the upper/Li Digital processir 20.8 \( \mu \) \( \mu \) \( \mu \) \( \mu \) Electrical calibra internally genera Windscreen con Compliant with IEC Diffuse sound fit Correction of fr (ANSI S1.4) in of The meter can be after the start but When the PAUS User Selectable Backlit semitran *LCD with touc	nearity range: 113 dB) 10 to 130 dB) 11 to 130 dB 11 to 130 dB 11 to 130 dB 12 to 130 dB 13 to 130 dB 14 to 130 dB 15 to 130 dB 16 to 130 dB 16 to 130 dB 17 to 130 dB 18	rements.  It sampling frequency Iding to IEC and JIS calibration performe It standards when the w cs in order to comp g a specified time (OF or when a user-set tr ause measurement, e excluded from pro D display WQVGA (4 buch Panel)	s standards, using d with the NC-74. indscreen is installed. In the NC-74 sindscreen is installed. If, 1, 3, 5 or 10 s) in the preceding cessing.
Level Ba Sw RMS Samp Calib Correct Delay	weiger ranger grap r grap detection ratio	ghting ge th display range max g of bar graph display bection circuit cycle n n functions	F (Fast) and S ( Single range (Li Max. 110 dB (2C Set the upper/ lc Digital processif 20.8 µs (Lp, Leq. 100 ms (Ln) Electrical calibra internally genera Windscreen corr Compliant with IEC Correction of fr (ANSI S1.4) in d The meter can be after the start but When the PAUS (user selectable Backlit semitran *LCD with touc Numerical display	nearity range: 113 dB) 10 to 130 dB) 11 to 130 dB) 12 to 130 dB) 13 to 130 dB) 14 to 130 dB) 15 to 130 dB) 16 to 130 dB) 17 to 130 dB) 18 to 130 dB) 18 to 130 dB) 19 to 1	rements.  Is sampling frequency ding to IEC and JIS calibration performe  I standards when the war cas in order to compare a specified time (OF or when a user-set trause measurement, a excluded from proportion of display WQVGA (4 bouch Panel)  Bar graph update	s standards, using d with the NC-74.  indscreen is installed.  bly with standards  iF, 1, 3, 5 or 10 s) igger is exceeded.  the preceding cessing.  400 x 240 dots)  frequency: 100 ms
Level Ba Sw RMS Samp Calib Correct Delay Back Displ.	weiger ranger grap r grap detection ratio	ghting ge ih display range max g of bar graph display bettion circuit cycle n in functions	F (Fast) and S ( Single range (Li Max. 110 dB (2C Set the upper/ lc Digital processin 20.8 µs (Lp, Leq. 100 ms (Lp) Electrical calibra internally genera Windscreen corr Compliant with IEC Diffuse sound fic (ANSI S1.4) in d The meter can be after the start but When the PAUS (user selectable Backlit semitran *LCD with touc Numerical display Data for measure	nearity range: 113 dB) 10 to 130 dB) 11 to 130 dB) 12 to 130 dB) 13 to 130 dB) 14 to 130 dB) 15 to 130 dB) 16 to 130 dB) 17 to 130 dB) 18 to 130 dB) 18 to 130 dB) 18 to 130 dB) 19 to 1	rements.  Is sampling frequency ding to IEC and JIS calibration performe  I standards when the war cas in order to compare a specified time (OF or when a user-set trause measurement, a excluded from proportion of display WQVGA (4 bouch Panel)  Bar graph update	s standards, using d with the NC-74.  indscreen is installed.  bly with standards  iF, 1, 3, 5 or 10 s) igger is exceeded.  the preceding cessing.  400 x 240 dots)  frequency: 100 ms
Level Ba Sw RMS Samp Calib Correct Delay Back Displ.	weiger ranger grap r grap detection ratio	ghting ge th display range max g of bar graph display bection circuit cycle n n functions e e se function	F (Fast) and S ( Single range (Li Max. 110 dB (2C Set the upper/ Li Digital processir 20.8 µs (Lp, Leq. 100 ms (L <sub>N</sub> ) Electrical calibra internally genera Windscreen cor Compliant with IEC Diffuse sound fic Correction of fra (ANSI S1.4) in C ANSI S1.4) in C When the PAUS (user selectable Backlit semitran *LCD with touc Numerical display Data for measure Internal memory	nearity range: 113 dB) to 130 dB) were limit in 10 dB inci g method  LE, Lmax, Lmin, Lpeak : ation performed accor ated signals: acoustic rection: 61672-1 and JIS C 1509- eld correction: equency characteristic iffluse sound field. e set to start measuring ton has been pressed to key is pressed to p 0) 0, 1, 3 or 5 s data ar sparent color TFT LCI th panel (Capacitive Te rupdate frequency: 1 s ment results are stored	rements.  sampling frequency rding to IEC and JIS calibration performe  1 standards when the w cs in order to comp g a specified time (OF or when a user-set tr ause measurement, e excluded from pro D display WQVGA ( bouch Panel) Bar graph update I manually in single and	s standards, using d with the NC-74.  indscreen is installed.  bly with standards  iF, 1, 3, 5 or 10 s) igger is exceeded.  the preceding cessing.  400 x 240 dots)  frequency: 100 ms
Level Ba Sw RMS Samp Calib Correct Delay Back Displ.	weiger ranger ra	ghting ge th display range max g of bar graph display bection circuit cycle n n functions e e se function	F (Fast) and S ( Single range (Li Max. 110 dB (2C Set the upper/ Li Digital processir 20.8 µs (Lp, Leq, 100 ms (L <sub>N</sub> ) Electrical calibra internally genera Windscreen cor Compliant with IEC Diffuse sound fit Correction of fri (ANSI S1.4) in d The meter can be after the start but When the PAUS (user selectable Backlit semitran *LCD with touc Numerical display Data for measure Internal memory SD Card: depen	nearity range: 113 dB) to 130 dB) were limit in 10 dB inci g method  LE, Lmax, Lmin, Lpeak : ation performed accor ated signals: acoustic rection: 61672-1 and JIS C 1509- acquency characteristic iffuse sound field. as set to start measuring ton has been pressed tE key is pressed to pa 10, 1, 3 or 5 s data ar as parent color TFT LCI the panel (Capacitive Tr rupdate frequency: 1 s ment results are stored: the max 1000 sets	rements.  sampling frequency ding to IEC and JIS calibration performe 1 standards when the w cs in order to comp g a specified time (OF or when a user-set tr ause measurement, e excluded from pro D display WQVGA (4 buch Panel) Bar graph update d manually in single an the SD Card*1	s standards, using d with the NC-74. indscreen is installed. ly with standards iF, 1, 3, 5 or 10 s) igger is exceeded. the preceding cessing. 400 x 240 dots) frequency: 100 ms ddress increments.
Level Ba Sw RMS Samp Calib Correct Delay Back Displ.	weiger ranger ra	ghting ge in display range max g of bar graph display settion circuit cycle n in functions e e se function	F (Fast) and S ( Single range (Li Max. 110 dB (2C Set the upper/Li Digital processir 20.8 µs (Lp, Leq, 100 ms (L,N) Electrical calibra internally genera Windscreen cor Compliant with IEC Diffuse sound fit Correction of fr (ANSI S1.4) in of The meter can bu after the start but When the PAUS (user selectable Backlit semitran *LCD with touc Numerical display Data for measure Internal memory SD Card: depen Instantaneous v	nearity range: 113 dB) 10 to 130 dB) 11 to 130 dB	rements.  It sampling frequency ding to IEC and JIS calibration performe  1 standards when the w cs in order to comp g a specified time (OF or when a user-set tr ause measurement, e excluded from pro D display WQVGA (a ouch Panel) Bar graph update d manually in single au the SD Card*1 processed values (La	s standards, using d with the NC-74. indscreen is installed. ly with standards iF, 1, 3, 5 or 10 s) igger is exceeded. the preceding cessing. 400 x 240 dots) frequency: 100 ms ddress increments.
Level Ba Sw RMS Samp Calib Correct Delay Back Displ.	ranger r grappitching determined bling ratio	ghting ge in display range max g of bar graph display settion circuit cycle n in functions e e se function	F (Fast) and S ( Single range (Li Max. 110 dB (2C Set the upper/Li Digital processir 20.8 µs (Lp, Leq, 100 ms (L,N) Electrical calibra internally genera Windscreen cor Compliant with IEC Diffuse sound fit Correction of fr (ANSI S1.4) in of The meter can bu after the start but When the PAUS (user selectable Backlit semitran *LCD with touc Numerical display Data for measure Internal memory SD Card: depen Instantaneous v	nearity range: 113 dB) 10 to 130 dB) 11 to 130 dB) 12 to 130 dB) 13 to 130 dB) 14 to 130 dB) 15 to 130 dB) 16 to 130 dB) 16 to 130 dB) 17 to 130 dB) 18 to 130 dB) 18 to 130 dB) 18 to 130 dB) 19 to 1	rements.  It sampling frequency ding to IEC and JIS calibration performe  1 standards when the w cs in order to comp g a specified time (OF or when a user-set tr ause measurement, e excluded from pro D display WQVGA (a ouch Panel) Bar graph update d manually in single au the SD Card*1 processed values (La	s standards, using d with the NC-74. indscreen is installed. ly with standards iF, 1, 3, 5 or 10 s) igger is exceeded. the preceding cessing. 400 x 240 dots) frequency: 100 ms ddress increments.

Data	recall		Allows viewing of stored data	
Setup	mem	ory	Up to five setup configurations can be saved in internal memory, for later recall	
		•	Start up via file settings previously stored on SD card possible	
Wavef	orm re	cording*3		
File format			Uncompressed waveform WAVE file	
Sar	mpling	frequency	Select 48 kHz, 24 kHz or 12 kHz	
Da	ta len	gth	Select 24 bit or 16 bit	
Outputs	DC (	output	Output DC signals using a frequency weighting characteristic selected by processing.	
	О	utput voltage	2.5 V, 25 mV / dB at bar graph display full scale	
	AC (	output	Output AC signals using a frequency weighting characteristic selected by	
			processing or by A, C, Z-weighting.	
	0	utput voltage	1 V (rms values) at bar graph display full scale	
	Com	parator	Turns on when the open-collector output exceeds the set value	
	outp	ut*2	(max. applied voltage 24 V, max. current 60 mA, allowable dissipation 300 mW).	
USB			Allows USB to be connected to a computer and recognized as a removable disk	
			Allows USB to be controlled via communication commands	
RS-23	32C co	ommunication	Allows for RS-232C communication via use of a dedicated cable	
Data o	continu	ous output*2		
Ту	pe of	Instantaneous value	Lp	
dat	ta	Processed value	Leq, Lmax, Lmin, Lpeak	
Ou	tput ir	nterval	100 ms	
Print o	out		Printing of measurement results on dedicated printer DPU-414	
Powe	r requ	irements	Four IEC R6 (size AA) batteries (alkaline or rechargeable batteries) or external power supply	
Ва	ttery l	fe (23 °C)	Alkaline battery LR6 (AA): 26 h Ni-MH secondary battery: 25 h	
			At the maximum *Depends on the setting	
AC	adap	ter	NC-98C (NC-34 for previous models cannot be used)	
Ex	ternal	power voltage	5 to 7 V (rated voltage: 6 V)	
Cu	rrent	consumption	Approximately 90 mA (normal operation, rated voltage)	
Ambie	ent	Temperature	-10 to +50 °C	
condit	ions	Humidity	10 to 90 % RH (non-condensing)	
Dustp	roof / v	vater-resistant	IP code: IP54 (except for microphone)	
perfor	mance	*4	See precautions regarding waterproofing	
Dimer	nsions	, weight	Approx. 250 (H) x 76 (W) x 33 mm(D), approx. 400 g (with batteries)	
Suppl	ied ac	cessories	Storage case x 1, Windscreen WS-10 x 1, Windscreen fall prevention rubber x 1,	
	Hand strap x 1, LR6 (AA) alkaline batteries x 4, SD card 512 MBx1 (NX-42EX			
			preinstalled model only)	

#### Options

Product name	Product number
Extended function program (Inst.on 512 MB SD card)	NX-42EX
Waveform recording program*2 (Inst.on 2 GB SD card)	NX-42WR
Octave, 1/3 octave real-time analysis program *2 (Inst.on 512 MB SD card)	NX-42RT
Reverberation time measurement program*2 (Inst.on 512 MB SD card)	NX-42RV
FFT analysis program*2 (Inst.on 512 MB SD card)	NX-42FT
Data management software for environmental measurement	AS-60
Data management software for environmental measurement (Includes the octave and 1/3 octave data management software)	AS-60RT
Data management software for environmental measurement (Includes the vibration level data management software)	AS-60VM
Waveform analysis software	AS-70
SD Card 512 MB	MC-51SD1
SD Card 2 GB	MC-20SD2
AC adapter (100 V to 240 V)	NC-98C
Battery pack	BP-21A
Microphone extension cables	EC-04 (from 2 m)
BNC-Pin output code	CC-24
Comparator output cable	CC-42C
Printer	DPU-414
Printer cable	CC-42P
RS 232C serial I/O cable	CC-42R
USB cable	Generic USB cable can be used
Sound calibrator	NC-74
All-weather windscreen	WS-15
Windscreen mounting adapter	WS-15006
Rain-protection windscreen	WS-16
Sound level meter tripod	ST-80
All-weather windscreen tripod	ST-81

\*1 Use Rion fully guaranteed products. \*2 NX-42EX required (sold separately). \*3 NX-42WR required (sold separately). \*4 Protection against harmful dust and water splashing from any direction.

Precautions regarding waterproofing

Before use, verify that the rubber bottom cover and the battery compartment lid are firmly closed.

To maintain the water and dust proof rating, internal packing replacement is required every five years (at cost).



Measurement Time

RION Co., Ltd. is recognized by the JCSS which uses ISO/IEC 17025 (JIS Q 17025) as an accreditation standard and bases its accreditation scheme on ISO/IEC 17011. JCSS is operated by the accreditation body (IA Japan) which is a signatory to the Asia Pacific Laboratory Accreditation Cooperation (APLAC) as well as the International Laboratory Accreditation Cooperation (ILAC). The Quality & Environmental Management system Center of RION Co., Ltd. is an international MRA compliant JCSS operator with the accreditation number JCSS 0197.

ISO 14001 RION CO., LTD. ISO 9 0 0 1 RION CO., LTD.



\* Windows is a trademark of Microsoft Corporation. \* Specifications subject to change without notice

storage mode(depends on the capacity of the SD card)\*1

Max. 1000 h in Auto  $L_{P}$  storage mode, max. 100 000 addresses in Auto  $L_{eq}$ 

Distributed by:



3-20-41, Higashimotomachi, Kokubunji, Tokyo 185-8533, Japan Tel: +81-42-359-7888 Fax: +81-42-359-7442

This product is environment-friendly. It does not include toxic chemicals on our policy.

This product is certified to an International Protection rating of IP54 (dust protected and resistant to splashing water). This leaflet is printed with environmentally friendly UV ink on recycled paper.