



## CR800 Series

Measurement and Control Datalogger

*Rugged, Reliable, and Ready  
for any Application*



More info: 435.227.9120

[campbellsci.com/cr800-series](http://campbellsci.com/cr800-series)



# CR800 and CR850 Measurement and Control Systems

The CR800 and CR850 dataloggers provide precision measurement capabilities in a rugged, battery-operated package. Both models consist of measurement electronics encased in a plastic shell and an integrated wiring panel. The standard operating range is -25° to +50°C. An extended range of -55° to +85°C for the CR800 or -30° to +80°C for the CR850 is also available.

## Removable Input/Output Connections

Individually configured for ratiometric resistive bridge, thermocouple, switch closure, high frequency pulse, low-level ac, serial sensors, and more.

## Removable Power Terminal

Simplifies connection to external power supply.

## CS I/O Port

Connects to Campbell Scientific peripherals

## RS-232 Port

Connects to PCs, serial sensors, or RS-232 modems

## Keyboard (CR850 only)

Allows onsite program editing and command entries

## Backlit LCD (CR850 only)

Provides a graphical or 8-line numeric data display.

## Benefits and Features

- 4 MB\* of battery-backed SRAM
- Program execution rate of up to 100 Hz
- CS I/O and RS-232 serial ports
- 13-bit analog to digital conversions
- 16-bit microcontroller with 32-bit internal CPU architecture
- Temperature compensated real-time clock
- Background system calibration for accurate measurements over time and temperature changes
- Single DAC used for excitation and measurements to give ratio-metric measurements
- Gas Discharge Tube (GDT) protected inputs
- Data values stored in tables with a time stamp and record number
- Battery-backed SRAM and clock that ensure data, programs, and accurate time are maintained while datalogger is disconnected from the main power source
- One program-status LED
- Serial communications with serial sensors and devices supported via I/O port pairs
- PakBus, Modbus, and DNP3 protocols supported

## Model Descriptions

The models differ in their keyboard display. The CR800 uses an external keyboard display, the CR1000KD, which connects to the CR800 via its CS I/O port. The CR850 includes an on-board keyboard display as part of its integrated package.

## Operating System/Logic Control

The on-board operating system includes measurement, processing, and output instructions for programming the datalogger. The programming language, CRBasic, uses a BASIC-like syntax. Measurement instructions specific to bridge configurations, voltage outputs, thermocouples, and pulse/frequency signals are included. Processing instructions support algebraic, statistical, and transcendental functions for on-site processing. Output instructions process data over time and control external devices.

## Storage Capacity\*

The CR800 series has 2 MB of flash memory for the Operating System, and 4 MB of battery-backed SRAM for CPU usage, program storage, and data storage. Data is stored in a table format.

\*Campbell Scientific is increasing the data storage memory from 2 MB to 4 MB. Dataloggers with a serial number greater than or equal to 3605 will have a 4 MB memory. The 4 MB dataloggers will also have a sticker on the canister stating "4M Memory".

## Input Output Terminals

### Analog Inputs

Three differential (6 single-ended) channels measure voltage levels. Resolution on the most sensitive range is 0.67  $\mu$ V.

### Pulse Counters

The CR800 and CR850 have two pulse channels that can count pulses from high level (5 V square wave), switch closure, or low level AC signals.

### Switched Voltage Excitations

Two outputs provide precision excitation voltages for resistive bridge measurements.

### Digital I/O Ports

The CR800-series dataloggers include four ports for frequency measurements, digital control, and triggering. Three of these ports can also be used to measure SDM devices. The I/O ports can be paired as transmit and receive. Each pair has 0 to 5 V UART hardware that allows serial communications with serial sensors and devices. An RS-232-to-logic level converter may be required in some cases.

### CS I/O Port

AC-powered PCs and many communication peripherals connect with the datalogger via this port. Connection to an AC-powered PC requires either an SC32B or SC-USB interface. These interfaces isolate the PC's electrical system from the datalogger, thereby protecting against ground loops, normal static discharge, and noise.

### RS-232 Port

This non-isolated port is for connecting a battery-powered laptop, serial sensor, or RS-232 modem. Because of ground loop potential on some measurements (e.g., low level single-ended), AC-powered PCs should use the CS I/O port instead of the RS-232 port (see above).

### Switched 12 Volt

This terminal provides unregulated 12 Vdc that can be switched on and off under program control.

## Transient Protection

Gas Discharge Tube (GDT) protects the inputs from electrical transients. The CR800 series is CE compliant under the European Union's EMC Directive, meeting ESD, EMC, Fast Transient standards.



The PS200 (above) and CH200 can monitor charge input voltage, battery voltage, on-board temperature, battery current, and load current.

## Communication Protocols

The CR800 series supports the PakBus, Modbus, DNP3, TCP/IP, FTP, and SMTP communication protocols. With the PakBus protocol, networks have the distributed routing intelligence to continually evaluate links. Continually evaluating links optimizes delivery times and, in the case of delivery failure, allows automatic switch over to a configured backup route.

The Modbus RTU protocol supports both floating point and long formats. The datalogger can act as a slave and/or master.

The DNP3 protocol supports only long data formats. The dataloggers are level 2 slave compliant, with some of the operations found in a level 3 implementation.

The TCP/IP, FTP, and SMTP protocols provide TCP/IP functionality when the datalogger is used in conjunction with an NL201 or NL240.


## Enclosure/Stack Bracket

A CR800 or CR850 housed in a weather-resistant enclosure can collect data under extremely harsh conditions. The 31551 and 31143 stack brackets allow a peripheral to be placed under the mounting bracket, thus conserving space. The 31143 is hinged, allowing easy access to the lower component during wiring or during maintenance.

## Power Supplies

Typically, the CR800 and CR850 dataloggers are powered using a PS200 power supply, PS150 power supply, or BPALK battery pack. The PS200 and PS150 provide a 7 Ah sealed rechargeable battery that should be connected to a charging source (either a power converter or solar panel). The BPALK consists of eight non-rechargeable D-cell alkaline batteries with a 7.5 Ah rating at 20°C.

Also available are the BP7, BP12, and BP24 battery, which provide nominal ratings of 7, 12, and 24 Ah, respectively. The BP7 is typically used instead of the PS150 or PS200 when the battery needs to be mounted under the 31143 Hinged Stack Bracket. The BP12 and BP24 batteries are for powering systems that have higher current drain equipment such as satellite transmitters. The BP7, BP12, and BP24 should be connected to a regulated charging source (e.g., a CH200 or CH150 connected to a unregulated solar panel or power converter).

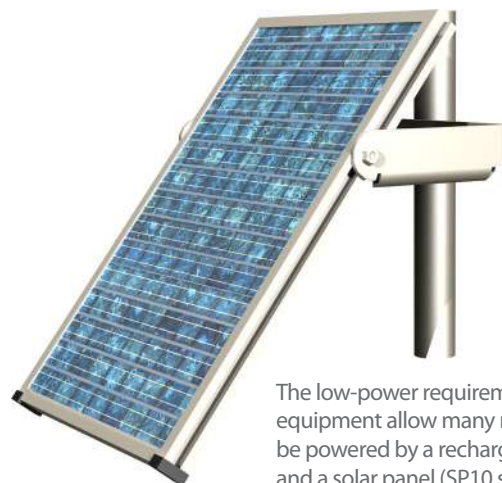

The low-power requirements of our equipment allow many remote sites to be powered by a rechargeable battery and a solar panel (SP10 shown above).



## Communication Options

*To determine the best option for an application, consider the accessibility of the site, availability of services (e.g., cellular phone or satellite coverage), quantity of data to collect, and desired time between data-collection sessions. Some communication options can be combined—increasing the flexibility, convenience, and reliability of the communications.*

### External Data Storage Device

The CR800 and CR850 can use the SC115 2 GB Flash Memory Drive to augment onsite data storage or to transport data between the datalogger and PC.



The SC115 is a light-weight, portable instrument that fits in a pocket allowing easy transport between the datalogger and PC.

### Keyboard Display

Keyboard displays are used to program the datalogger, manually initiate data transfer, and display data. Both the CR850's integrated keyboard display and the CR1000KD can show 8 lines by 21 characters (64 by 128 pixels). Their keyboard includes 16 characters. Custom menus are supported allowing customers to set up choices within the datalogger program that can be initiated by a simple toggle or pick list.

### Mountable Displays

The CD100 and CD295 can be mounted in an enclosure lid. The CD100 has the same functionality and operation as the CD1000KD, allowing both data entry and display without opening the enclosure. The CD295 displays real-time data only.

### iOS Devices and Android Devices

An iOS device or Android device can communicate with the datalogger or connect to the LoggerNet network using Apps available, at no charge, from the Apple Store or Google Play.

### Direct Links

AC-powered PCs connect with the datalogger's CS I/O port via an SC32B or SC-USB interface. These interfaces provide optical isolation. A battery-powered laptop can be attached to the datalogger's RS-232 port via an RS-232 cable; no interface required.

### Internet and IP Networks

The NL240 or NL201 interfaces enable the CR800-series datalogger to communicate with a PC via TCP/IP.

### Multidrop Interface

The MD485 intelligent RS-485 interface permits a PC to address and communicate with one or more dataloggers over the CABLE2TP two-twisted pair cable. Distances up to 4000 feet are supported.

### Telephone Networks

The CR800 series can communicate with a PC using landlines or cellular transceivers. A voice synthesized modem enables anyone to call the datalogger via phone and receive a verbal report of real-time site conditions.

### Short Haul Modems

The SRM-5A RAD Short Haul Modem supports communications between the datalogger and a PC via a four-wire unconditioned line (two twisted pairs).

### Satellite Transmitters

The CR800 and CR850 can transmit data using the Argos, Iridium, Inmarsat BGAN, GOES, or Meteosat satellite systems. Satellite telemetry offers an alternative for remote locations where phone lines or RF systems are impractical.

### Radios

Radio frequency (RF) communications are supported via narrow-band UHF, narrow-band VHF, spread spectrum, or meteor burst radios. Line-of-sight is required for all of our RF options.



In Virginia, our RF500M Narrowband Radio Modem provides time- and event-driven ALERT data transmission.

## Channel Expansion

### 4-Channel Low Level AC Module

The LLAC4 is a small peripheral device that allows customers to increase the number of available low-level AC inputs by using control ports. This module is often used to measure up to four anemometers, and is especially useful for wind profiling applications.

### Multiplexers

Multiplexers increase the number of sensors that can be measured by a datalogger by sequentially connecting each sensor to the datalogger. Several multiplexers can be controlled by a single datalogger. The CR800 and CR850 are compatible with the AM16/32B and AM25T multiplexers.

### Synchronous Devices for Measurement (SDMs)

SDMs are addressable peripherals that expand the datalogger's measurement and control capabilities. For example, SDMs are available to add control ports, analog outputs, pulse count channels, interval timers, or even a CANbus interface to the system. Multiple SDMs, in any combination, can be connected to one datalogger.



The SDM-SIO1A Serial Input/Output Module adds an RS-232 or RS485 port for interfacing with intelligent sensors. Up to 15 SDM-SIO1A modules can be connected to one CR800 or CR850 datalogger.

## Software


### Starter Software

Our easy-to-use starter software is intended for first time users or applications that don't require sophisticated communications or datalogger program editing. SCWin Short Cut generates straight-forward datalogger programs in four easy steps. PC200W allows customers to transfer a program to, or retrieve data from a CR800 or CR850 via a direct communications link.

At [www.campbellsci.com/downloads](http://www.campbellsci.com/downloads), the starter software can be downloaded at no charge. Our Resource DVD also provides this software as well as PDF versions of our brochures and manuals.

### Datalogger Support Software

Our datalogger support software packages provide more capabilities than our starter software. These software packages contains program editing, communications, and display tools that can support an entire datalogger network.

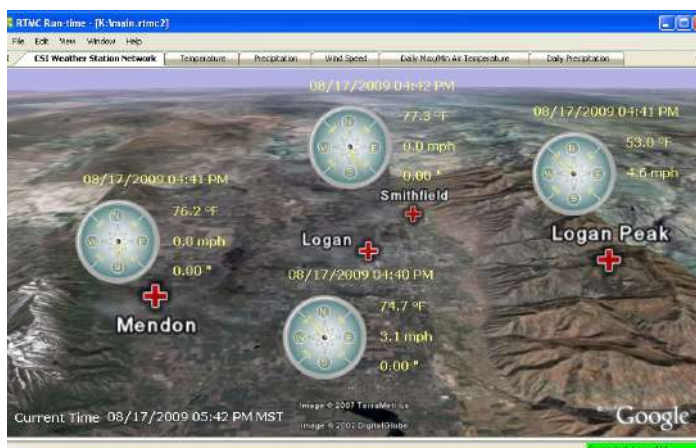


RTMC, a program for displaying the datalogger's data, is bundled with LoggerNet and RTDAQ. RTMCRT and RTMC Web Server clients also use forms created in the developer mode of RTMC.

PC400, our mid-level software, supports a variety of telemetry options, manual data collection, and data display. For programming, it includes both Short Cut and the CRBasic program editor. PC400 does not support combined communication options (e.g., phone-to-RF), PakBus® routing, and scheduled data collection.

RTDAQ is an ideal solution for industrial and real-time users desiring to use reliable data collection software over a single telecommunications medium, and who do not rely on scheduled data collection. RTDAQ's strength lies in its ability to handle the display of high-speed data.

LoggerNet is Campbell Scientific's full-featured datalogger support software. It is referred to as "full-featured" because it provides a way to accomplish almost all the tasks you'll need to complete when using a datalogger. LoggerNet supports combined communication options (e.g., phone-to-RF) and scheduled data collection.

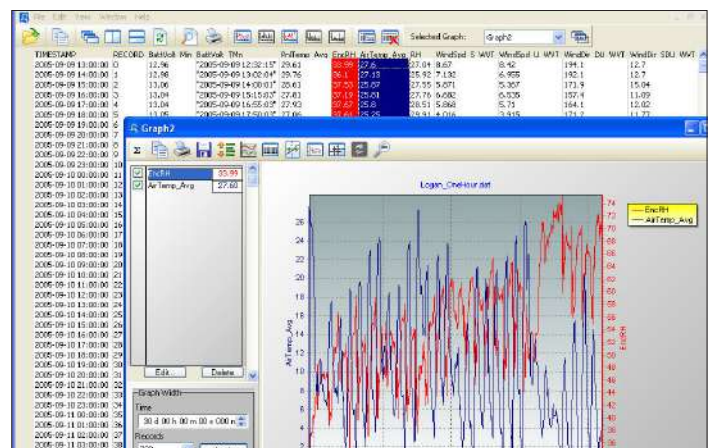

Both LoggerNet and RTDAQ use View Pro to display historical data in a tabular or graphical format.



## Applications

*The measurement precision, flexibility, long-term reliability, and economical price of the CR800 and CR850 make them ideal for scientific, commercial, and industrial applications.*

### Meteorology

The CR800 series is used in long-term climatological monitoring, meteorological research, and routine weather measurement applications.



Meteorological conditions affecting marine larvae distribution are monitored at Exuma Cay, Bahamas.

Sensors the CR800 series can measure include:

- cup, propeller, and sonic anemometers (up to 10 anemometers can be measured by using two LLAC4 peripherals)
- wind vanes
- thermistors, RTDs, and thermocouples
- barometers
- pyranometers

Data is output in a choice of units (e.g., wind speed in miles per hour, meters per second, or knots). Standard outputs include wind vector averaging, sigma, theta, and histograms.

### Agriculture and Agricultural Research

The versatility of the CR800 and CR850 allows measurement of agricultural processes and equipment in applications such as:

- plant water research
- crop management decisions
- canopy energy balance
- food processing/storage
- plant pathology
- integrated pest management
- machinery performance
- irrigation scheduling
- frost prediction

### Wind Profiling

Our data acquisition systems can monitor conditions at wind assessment sites, at producing wind farms, and along transmission lines. The reliability of these systems ensures data collection, even under adverse conditions. Wide operating temperature ranges and weatherproof enclosures allow our systems to operate reliably in harsh environments.

The CR800 or CR850 makes and records measurements, controls electrical devices, and can function as PLCs or RTUs. Because the datalogger has its own power supply (batteries, solar panels), it can continue to measure and store data and perform control during power outages.

Typical sensors for wind assessment applications include, but are not limited to:

- cup, propeller, and sonic anemometers (up to 10 anemometers can be measured by using two LLAC4 peripherals)
- wind vanes
- thermistors, RTDs, and thermocouples
- barometers
- pyranometers

For turbine performance applications, the CR800 series monitors electrical current, voltage, wattage, stress, and torque.



Photo courtesy RADTech Ltd. UK

A Campbell Scientific datalogging system monitors this offshore wind farm located between Rhyl and Prestatyn in North Wales at about 7 to 8 km out to sea.

## Air Quality

The CR800 series can monitor and control gas analyzers, particle samplers, and visibility sensors. The datalogger can also automatically control calibration sequences and compute conditional averages that exclude invalid data (e.g., data recorded during power failures or calibration intervals).

## Water Resources/Aquaculture

Our CR800 series is well-suited to remote, unattended monitoring of hydrologic conditions. Most hydrologic sensors, including SDI-12 probes, interface directly to the datalogger.



The CR800-series dataloggers are ideal for monitoring water quality and level at reservoirs, springs, canals, pipelines, and culinary sites.

Typical hydrologic measurements:

- › **Water level** is monitored with incremental shaft encoders, double bubblers, ultrasonic ranging sensors, resistance tapes, strain gage pressure transducers, or vibrating wire pressure transducers. Vibrating wire transducers require an CDM-VW300-series, AVW200-series or another vibrating wire interface.
- › **Well draw-down tests** use a pressure transducer measured at logarithmic intervals or at a rate based on incremental changes in water level.
- › **Ionic conductivity measurements** use one of the switched excitation ports from the datalogger.
- › **Samplers** are controlled by the CR800 or CR850 as a function of time, water quality, or water level.
- › **Alarm and pump actuation** are controlled through digital I/O ports that operate external relay drivers

## Vehicle Testing

This versatile, rugged datalogger is ideally suited for testing cold and hot temperature, high altitude, off-highway, and cross-country performance. The CR800 and CR850 are compatible with our SDM-CAN interface, GPS16X-HVS receiver.



Vehicle monitoring includes not only passenger cars, but airplanes, locomotives, helicopters, tractors, buses, heavy trucks, drilling rigs, race cars, and motorcycles.

## Soil Moisture

The CR800 and CR850 are compatible with the following soil moisture measurement technologies:

- › **Soil moisture blocks** are inexpensive sensors that estimate soil water potential.
- › **Matric water potential sensors** also estimate soil water potential but are more durable than soil moisture blocks.
- › **Time-Domain Reflectometry Systems (TDR)** use a reflectometer controlled by the datalogger to accurately measure soil water content. Multiplexers allow sequential measurement of a large number of probes by one reflectometer.
- › **Self-contained water content reflectometers** are sensors that emit and measure a TDR pulse.
- › **Tensiometers** measure the soil pore pressure of irrigated soils and calculate soil moisture.

## Other Applications

- › Wireless sensor/datalogger networks
- › Avalanche forecasting, snow science, polar, high altitude.
- › Fire weather
- › Geotechnical
- › Historic preservation



Data measured by this weather station near Aspen, Colorado is used in avalanche forecasting.



# CR800-Series Specifications

Electrical specifications are valid over a -25° to +50°C, non-condensing environment, unless otherwise specified. Recalibration recommended every three years. Critical specifications and system configuration should be confirmed with Campbell Scientific before purchase.

## PROGRAM EXECUTION RATE

10 ms to one day @ 10 ms increments

## ANALOG INPUTS (SE1-SE6 or DIFF1-DIFF3)

3 differential (DIFF) or 6 single-ended (SE) individually configured input channels. Channel expansion provided by optional analog multiplexers.

**RANGES and RESOLUTION:** Basic resolution (Basic Res) is the resolution of a single A/D conversion. A DIFF measurement with input reversal has better (finer) resolution by twice than Basic Res.

Range (mV) <sup>1</sup>	DIFF Res (μV) <sup>2</sup>	Basic Res (μV)
±5000	667	1333
±2500	333	667
±250	33.3	66.7
±25	3.33	6.7
±7.5	1.0	2.0
±2.5	0.33	0.67

<sup>1</sup>Range overhead of ~9% on all ranges guarantees that full-scale values will not cause over range.

<sup>2</sup>Resolution of DIFF measurements with input reversal.

## ACCURACY<sup>3</sup>:

±(0.06% of reading + offset), 0° to 40°C

±(0.12% of reading + offset), -25° to 50°C

±(0.18% of reading + offset), -55° to 85°C (-XT only)

<sup>3</sup>Accuracy does not include sensor and measurement noise.

Offsets are defined as:

Offset for DIFF w/input reversal = 1.5·Basic Res + 1.0 μV

Offset for DIFF w/o input reversal = 3·Basic Res + 2.0 μV

Offset for SE = 3·Basic Res + 3.0 μV

## ANALOG MEASUREMENT SPEED:

Integration Type/ Code	Integration Time	Settling Time	Total Time <sup>4</sup>	
			SE w/ No Rev	DIFF w/ Input Rev
250	250 μs	3 ms	~1 ms	~12 ms
60 Hz <sup>5</sup>	16.67 ms	3 ms	~20 ms	~40 ms
50 Hz <sup>5</sup>	20.00 ms	3 ms	~25 ms	~50 ms

<sup>4</sup>Includes 250 μs for conversion to engineering units.  
<sup>5</sup>AC line noise filter.

**INPUT NOISE VOLTAGE:** For DIFF measurements with input reversal on ±2.5 mV input range; digital resolution dominates for higher ranges.

250 μs Integration: 0.34 μV RMS

50/60 Hz Integration: 0.19 μV RMS

**INPUT LIMITS:** ±5 V

**DC COMMON MODE REJECTION:** >100 dB

**NORMAL MODE REJECTION:** 70 dB @ 60 Hz when using 60 Hz rejection

**INPUT VOLTAGE RANGE W/O MEASUREMENT**

**CORRUPTION:** ±8.6 Vdc max.

**SUSTAINED INPUT VOLTAGE W/O DAMAGE:** ±16 Vdc max.

**INPUT CURRENT:** ±1 nA typical, ±6 nA max. @ 50°C;

±90 nA @ 85°C

**INPUT RESISTANCE:** 20 GΩ typical

**ACCURACY OF BUILT-IN REFERENCE JUNCTION**

**THERMISTOR (for thermocouple measurements):**

±0.3°C, -25° to 50°C

±0.8°C, -55° to 85°C (-XT only)

## ANALOG OUTPUTS (VX1-VX2)

2 switched voltage outputs sequentially active only during measurement.

**RANGE AND RESOLUTION:**

Channel	Range	Resolution	Current Source/Sink
(VX 1-2)	±2.5 Vdc	0.67 mV	±25 mA

Voltage outputs programmable between ±2.5 V with 0.67 mV resolution.

**ANALOG OUTPUT ACCURACY (VX):**

±(0.06% of setting + 0.8 mV), 0° to 40°C

±(0.12% of setting + 0.8 mV), -25° to 50°C

±(0.18% of setting + 0.8 mV), -55° to 85°C (-XT only)

**Vx FREQUENCY SWEEP FUNCTION:** Switched outputs provide a programmable swept frequency, 0 to 2500 mv square waves for exciting vibrating wire transducers.

## PERIOD AVERAGE

Any of the 6 SE analog inputs can be used for period averaging. Accuracy is ±(0.01% of reading + resolution), where resolution is 136 ns divided by the specified number of cycles to be measured.

**INPUT AMPLITUDE AND FREQUENCY:**

Voltage Gain	Input Range (±mV)	Input Signal (peak to peak)		Min Pulse Width (μV)	Max <sup>8</sup> Freq (kHz)
		Min (mV) <sup>6</sup>	Max (V) <sup>7</sup>		
1	250	500	10	2.5	200
10	25	10	2	10	50
33	7.5	5	2	62	8
100	2.5	2	2	100	5

<sup>6</sup>Signal centered around *Threshold* (see *PeriodAvg()* instruction).  
<sup>7</sup>Signal centered around datalogger ground.  
<sup>8</sup>Maximum frequency = 1/(twice minimum pulse width) for 50% of duty cycle signals.

## RATIOMETRIC MEASUREMENTS

**MEASUREMENT TYPES:** Provides ratiometric resistance measurements using voltage excitation. Three switched voltage excitation outputs are available for measurements of 4- and 6-wire full bridges, and 2-, 3-, and 4-wire half bridges. Optional excitation polarity reversal minimizes dc errors.

**RATIOMETRIC MEASUREMENT ACCURACY:**<sup>9,10,11</sup>

±(0.04% of voltage measurement + offset)

<sup>9</sup>Accuracy specification assumes excitation reversal for excitation voltages < 1000 mV. Assumption does not include bridge resistor errors and sensor and measurement noise.

<sup>10</sup>Estimated accuracy, ΔX (where X is value returned from the measurement with Multiplier = 1, Offset = 0):

**BrHalf()** instruction: ΔX = ΔV<sub>x</sub>/V<sub>x</sub>

**BrFull()** instruction: ΔX = 1000·ΔV<sub>x</sub>/V<sub>x</sub>, expressed as mV·V<sup>-1</sup>.

ΔV<sup>-1</sup> is calculated from the ratiometric measurement accuracy. See *Resistance Measurements Section in the manual for more information*.

<sup>11</sup>Offsets are defined as:

Offset for DIFF w/input reversal = 1.5·Basic Res + 1.0 μV

Offset for DIFF w/o input reversal = 3·Basic Res + 2.0 μV

Offset for SE = 3·Basic Res + 3.0 μV

Excitation reversal reduces offsets by a factor of two.

## PULSE COUNTERS (P1-P2)

2 inputs individually selectable for switch closure, high frequency pulse, or low-level ac. Independent 24-bit counters for each input.

**MAXIMUM COUNTS PER SCAN:** 16.7 x 10<sup>6</sup>

**SWITCH CLOSURE MODE:**

Minimum Switch Closed Time: 5 ms

Minimum Switch Open Time: 6 ms

Max. Bounce Time: 1 ms open w/o being counted

**HIGH FREQUENCY PULSE MODE:**

Maximum Input Frequency: 250 kHz

Maximum Input Voltage: ±20 V

Voltage Thresholds: Count upon transition from below 0.9 V to above 2.2 V after input filter with 1.2 μs time constant.

**LOW LEVEL AC MODE:** Internal ac coupling removes dc offsets up to ±0.5 V.

Input Hysteresis: 12 mV @ 1 Hz

Maximum ac Input Voltage: ±20 V

Minimum ac Input Voltage:

Sine Wave (mV RMS)	Range(Hz)
20	1.0 to 20
200	0.5 to 200
2000	0.3 to 10,000
5000	0.3 to 20,000

## DIGITAL I/O PORTS (C1-C4)

4 ports software selectable, as binary inputs or control outputs. Provide on/off, pulse width modulation, edge timing, subroutine interrupts/wake up, switch closure pulse counting, high-frequency pulse counting, asynchronous communications (UARTs), SDI-12 communications, and SDM communications.

**LOW FREQUENCY MODE MAX:** <1 kHz

**HIGH FREQUENCY MAX:** 400 kHz

**SWITCH CLOSURE FREQUENCY MAX:** 150 Hz

**EDGE TIMING RESOLUTION:** 540 ns

**OUTPUT VOLTAGES (no load):** high 5.0 V ±0.1 V; low <0.1

**OUTPUT RESISTANCE:** 330 Ω

**INPUT STATE:** high 3.8 to 16 V; low -8.0 to 1.2 V

**INPUT HYSTERESIS:** 1.4 V

**INPUT RESISTANCE:**

100 kΩ with inputs <6.2 Vdc

220 Ω with inputs ≥6.2 Vdc

**SERIAL DEVICE / RS-232 SUPPORT:** 0 to 5 Vdc UART

## SWITCHED 12 V (SW12)

One independent 12 Vdc unregulated source is switched on and off under program control. Thermal fuse hold current = 900 mA @ 20°C, 650 mA @ 50°C, 360 mA @ 85°C.

## EU DECLARATION OF CONFORMITY

[https://campbellsci.com/documents/us/compliance/eudoc\\_cr800-series.pdf](https://campbellsci.com/documents/us/compliance/eudoc_cr800-series.pdf)

## COMMUNICATIONS

**RS-232 PORTS:**

DCE 9-pin: (not electrically isolated) for computer connection or connection of modems not manufactured by Campbell Scientific.

COM1 to COM2: Two independent Tx/Rx pairs on control ports (non-isolated); 0 to 5 Vdc UART

Baud Rate: selectable from 300 bps to 115.2 kbps.

Default Format: 8 data bits; 1 stop bits; no parity

Optional Formats: 7 data bits; 2 stop bits; odd, even parity

**CS I/O PORT:** Interface with telecommunication peripherals manufactured by Campbell Scientific

**SDI-12:** Digital control ports C1 or C3 are individually configurable and meet SDI-12 Standard version 1.3 for datalogger mode. Up to 10 SDI-12 sensors are supported per port.

**PROTOCOLS SUPPORTED:** PakBus, AES-128 Encrypted PakBus, Modbus, DNP3, FTP, HTTP, XML, HTML, POP3, SMTP, Telnet, NTCIP, NTP, Web API, SDI-12, SDM

## SYSTEM

**PROCESSOR:** Renesas H8S 2322 (16-bit CPU with 32-bit internal core running at 7.4 MHz)

**MEMORY:** 2 MB of flash for operating system; 4 MB of battery-backed SRAM for CPU usage, program storage and final data storage

**RTC CLOCK ACCURACY:** ±3 min. per year. Correction via GPS optional.

**RTC CLOCK RESOLUTION:** 10 ms

## SYSTEM POWER REQUIREMENTS

**VOLTAGE:** 9.6 to 16 Vdc

**INTERNAL BATTERIES:** 1200 mA h lithium battery for clock and SRAM backup, typically provides 3 years of backup

**EXTERNAL BATTERIES:** Optional 12 Vdc nominal alkaline and rechargeable available. Power connection is reverse polarity protected.

**TYPICAL CURRENT DRAIN @ 12 Vdc:**

Sleep Mode: 0.7 mA typical; 0.9 mA max.

1 Hz Sample Rate (1 fast SE measurement): 1 mA

100 Hz Sample Rate (1 fast SE measurement): 16.2 mA

100 Hz Sample Rate (1 fast SE meas w/RS-232

communication): 28 mA

Active external keyboard display adds 7 mA (100 mA with backlight on).

## PHYSICAL

**DIMENSIONS:** 24.1 x 10.4 x 5.1 cm (9.5 x 4.1 x 2 in); additional clearance required for cables and leads.

**WEIGHT:** 0.7 kg (1.5 lb)

## WARRANTY

3-years against defects in materials and workmanship.

