

# CENTER 31

## HYGRO THERMOMETER



### **Features:**

- Large, easy-to-read dual LCD displays Humidity and Temperature.
- 3%RH humidity accuracy.
- Calibration available on site.
- Desk or wall mount.
- MAX/MIN value monitor.
- Audible and visual alarms, with adjustable set points, warns if limits are exceeded.

CE

**CENTER**®

## FEATURES

- Large, easy-to-read dual LCD displays Humidity and Temperature.
- 3%RH humidity accuracy.
- Calibration available on site.
- Desk or wall mount.
- MAX/MIN value monitor.
- Audible and visual alarms, with adjustable set points, warns if limits are exceeded.

## SPECIFICATIONS

### Measurement Range:

Humidity: 0%RH~100%RH

Temperature: -20°C~60°C ; -4°F~140°F

Dew Point Temperature: -20°C~60°C ; -4°F~140°F

**Resolution:** 0.1°C/0.1°F/0.1%RH

### Accuracy:

Temperature: ±0.8°C, 1.5°F

Humidity: ±3.0%RH

**Display:** LCD, 2lines.

**Measuring Interval:** 20 sec.

**Battery Type:** 1.5V AAA size battery x 4


**Battery Lifetime:** Approx. one year

**Operating Condition:** 0°C to 40°C ; 32°F~104°F

**Dimensions:** 140(L)×105(W)×26(H)mm /265g

**Accessories:** Batteries, Instruction Manual

### ▶ Large, Easy-to-read Dual LCD Display:

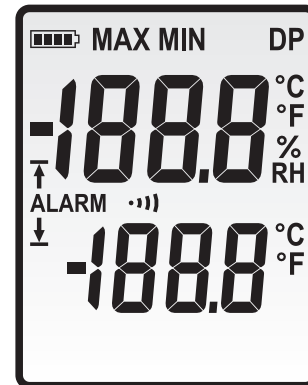

### ▶ Calibration Available On Site:



Back stand with hanging support.



33%RH / 75%RH Humidity Standard (OPTIONAL)

\* The specifications and other information in this catalogue are subject to change without prior notice.

**CENTER**<sup>®</sup>  
**CENTER TECHNOLOGY CORP.**

4/F., NO.415, Jung-Jeng Rd., 238 Shu-Lin, Taipei, Taiwan  
TEL: 886-2-26763926 E-Mail: center@centertek.com  
FAX: 886-2-26763925 http://www.centertek.com

Distributed by: