


AC Line Splitter

DE-10ALS



- **Apply For:** AC Volt & AC Current
- **Amplified Rate Of Current:** x1 time, x10 times
- **Power Line Rate:** 120V AC, 15A AC max.
- **Dimension:** 153(L) x 53(W) x 28(H)mm
- **Clamp Opening Size:** 25 x 25mm
- **Weight:** Approx. 100g (0.22 lbs)

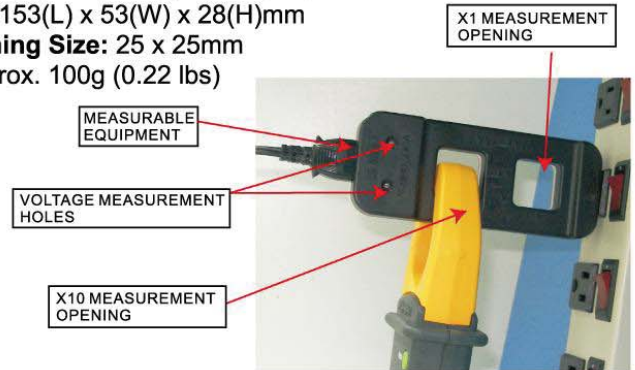

Test Lead



DE-TL05

DE-TL06



DE-TL55

DE-TL57

DE-TL58

- DE-TL05 : Test Lead
- DE-TL06 : Test Lead with Alligator Clip

- Complied with safety standard IEC61010-031:2002+A1:2008
- Overmolding (double insulation)
- DE-TL55 : Convertible Test Lead
- DE-TL57 : 19mm exposed metal probe of Test Lead with cap
- DE-TL58 : 4mm exposed metal probe of Test Lead
- ※ More designs/specs are available; please contact us for more details.

K-Type Thermocouple



NR-38



NR-38W

Model:

1. NR-34-INCO (-50°C ~ 1100°C)
2. NR-34 (-50°C ~ 600°C)
3. NR-31B (-50°C ~ 500°C)
4. NR-39B (-50°C ~ 250°C)
5. NR-39 (-50°C ~ 250°C)

※ There are more specification available; please contact us for more detail.

Model:

- NR-38 K-Type thermocouple adaptor
- NR-38W K-Type thermocouple with wire