

TEMPERATURE HiTESTER 3441,3442

Environmental Measuring Instruments




Supports temperature management needs of various applications



■ 3441/3442 Extended Operation, Max/Min Temperature Recording, Water-resistant Construction (3442 only)

- The **3442** has a water-resistant construction.
- Measurement in damp environments is possible by using the thermometer in combination with the **9472** or **9475** temperature probe. (-100°C to 1300°C)*
- Choose from 9 different temperature probes (optional), according to your application.

- Recording of maximum temperature and minimum temperature

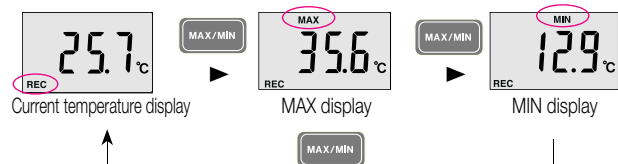

The **3441** and **3442** support temperature management by recording maximum and minimum temperatures in memory. By pressing the MAX/MIN key, you can switch to display of the current maximum and minimum temperatures at any time.

* Measurable temperature range varies according to temperature sensor type.



ISO 9001
JMI-0216



ISO 14001
JQA-E-90091



www.hioki.com

HIOKI company overview, new products, environmental considerations and other information are available on our website.



3441/3442 Specifications (accuracy at 23°C ±5°C, 80% rh or less)

Measurement sensor : Type K thermocouple	Operating environment : Indoors, at altitude up to 2000 m
Measurement range : -100°C to 1300°C (-148°F to 2372°F)	Ambient conditions
Resolution : 0.1°C (100.0 to 199.9°C), 1°C (200 to 1300°C)/ 0.1°F (-148°F to 392°F), 1°F (393°F to 2372°F)	for use: 0 to 40°C (32°F to 104°F), 80% rh or less (non-condensating)
Accuracy : ±0.1% rdg. ±0.8°C (from -100.0 to 199.9°C)/ (Period of guaranteed accuracy: 6 months) ±0.1% rdg. ±1.5°F (-148°F to 392°F)	for storage: -10 to 50°C (14°F to 122°F), 80% rh or less (non-condensating)
Temperature coefficient : 0.03°C/°C (from -100.0 to 199.9°C) / 0.054°F/°F (-148°F to 392°F)	Applicable standards : Safety, EN61010, Measurement category I, Pollution level 2/EMC, EN61326
0.05°C/°C (from 200 to 1300°C) / 0.09°F/°F (393°F to 2372°F)	Water resistance: IP54 (EN60529)
Sampling rate : 2 / second	Power supply : LR6 alkaline battery × 4
Display : LCD display	R6P manganese battery × 4
Reference contact compensation : Automatic	Maximum rated power: 35 mVA
Functions : Max/Min temperature recording and display, display data hold, sensor discontinuity display (---), over-range display (O.F. - O.F), auto power save (operates after 30 min, can be disabled), low battery warning	Continuous operating time : 200 hours or more (using manganese batteries)
	Dimensions and mass : Approx. 74(W) × 155(H) × 24(D) mm (2.6 × 5.9 × 0.95 in), approx. 160g (5.6 oz) (not including batteries or probe)
	Accessories : R6P manganese battery × 4, Strap band, Instruction manual


Choose from a wide range of temperature sensors for various applications (optional)

unit=mm (inch)


TEMPERATURE PROBE for 3441 / 3442

●:water-resistant structure


9472 / 9473 SHEATH TYPE




9474 / 9475 SHEATH TYPE




9180 / 9183 SHEATH TYPE




9182 SHEATH TYPE



9181 SURFACE TYPE



9476 SURFACE TYPE



water-resistant structure

Item	9472	9473	9474	9475	9183	9180	9476	9181	9182
Thermocouple material	K type (Chromel/Almel)								
Tolerance	The greater of ±1.5°C(2.7°F) or ±0.4% of measured temperature				The greater of ±2.5°C(4.5°F) *1				
Response (90%)*	About 5 sec	About 10 sec	About 5 sec	About 10 sec	About 5 sec		About 3 sec		About 5 sec
Size of Sheath	φ2.3×150mm	φ4.8×300mm	φ2.3×100mm	φ4.8×100mm	φ3.2×150 mm		φ20 mm	φ15 mm	φ3.2×500mm
Cable	General use (-20°C to 90°C, -4°F to 194°F) 1 m (0°C~150°C) 2m								
Grip heat resistance	80°C				150°C		80°C	150°C	90°C
Max use temperature	-100 to 300°C -148 to 572°F	0 to 800°C 32 to 1472°F	-100 to 300°C -148 to 572°F	-100 to 500°C -148 to 932°F	-50 to 750°C -58 to 1382°F		-40 to 500°C -40 to 932°F	-50 to 400°C -58 to 752°F	-50 to 750°C -58 to 1382°F

* Sheath type: Responsiveness in ice water at 0°C (32°F) and in boiling water at 100°C(212°F)
Surface type: Responsiveness on a metal surface at 0°C (32°F) and at 100°C(212°F)

*1 9180, 9182: The greater of ±2.5°C(4.5°F) or ±0.75% of measured temperature
9476: (-0.03 ×T)°C to + 2.5°C at 100°C<(T-Ts)
9181: (-0.035×T)°C to + 2.5°C at 100°C<(T-Ts)
T: measured temperature, Ts: environmental temperature

TEMPERATURE HiTESTER 3441 (°C only)

TEMPERATURE HiTESTER 3441-02 (°C/°F selectable)

TEMPERATURE HiTESTER 3442 (°C only)

Options for 3441(-02), 3442

SHEATH TYPE TEMPERATURE PROBE	9180	SHEATH TYPE TEMPERATURE PROBE	9472
SURFACE TYPE TEMPERATURE PROBE	9181	SHEATH TYPE TEMPERATURE PROBE	9473
SHEATH TYPE TEMPERATURE PROBE	9182	SHEATH TYPE TEMPERATURE PROBE	9474
SHEATH TYPE TEMPERATURE PROBE	9183	SHEATH TYPE TEMPERATURE PROBE	9475
		SURFACE TYPE TEMPERATURE PROBE	9476
		CARRYING CASE	9386-01

Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

HIOKI

HIOKI E. E. CORPORATION

HEADQUARTERS:

81 Koizumi, Ueda, Nagano, 386-1192, Japan
TEL +81-268-28-0562 FAX +81-268-28-0568
http://www.hioki.com / E-mail: os-com@hioki.co.jp

HIOKI USA CORPORATION:

TEL +1-609-409-9109 FAX +1-609-409-9108
http://www.hiokiusa.com / E-mail: hioki@hiokiusa.com

HIOKI (Shanghai) SALES & TRADING CO., LTD.:

TEL +86-21-63910090 FAX +86-21-63910360
http://www.hioki.cn / E-mail: info@hioki.com.cn

HIOKI INDIA PRIVATE LIMITED:

TEL +91-124-6590210 FAX +91-124-6460113
E-mail: hioki@hioki.in

HIOKI SINGAPORE PTE. LTD.:

TEL +65-6634-7677 FAX +65-6634-7477
E-mail: info@hioki.com.sg

HIOKI KOREA CO., LTD.:

TEL +82-42-936-1281 FAX +82-42-936-1284
E-mail: info-kr@hioki.co.jp

DISTRIBUTED BY