


ALTAIR[®] 4X

IT'S WHAT'S INSIDE THAT COUNTS

ALTAIR 4X Multigas Detector
With MSA XCell[®] Sensor Technology

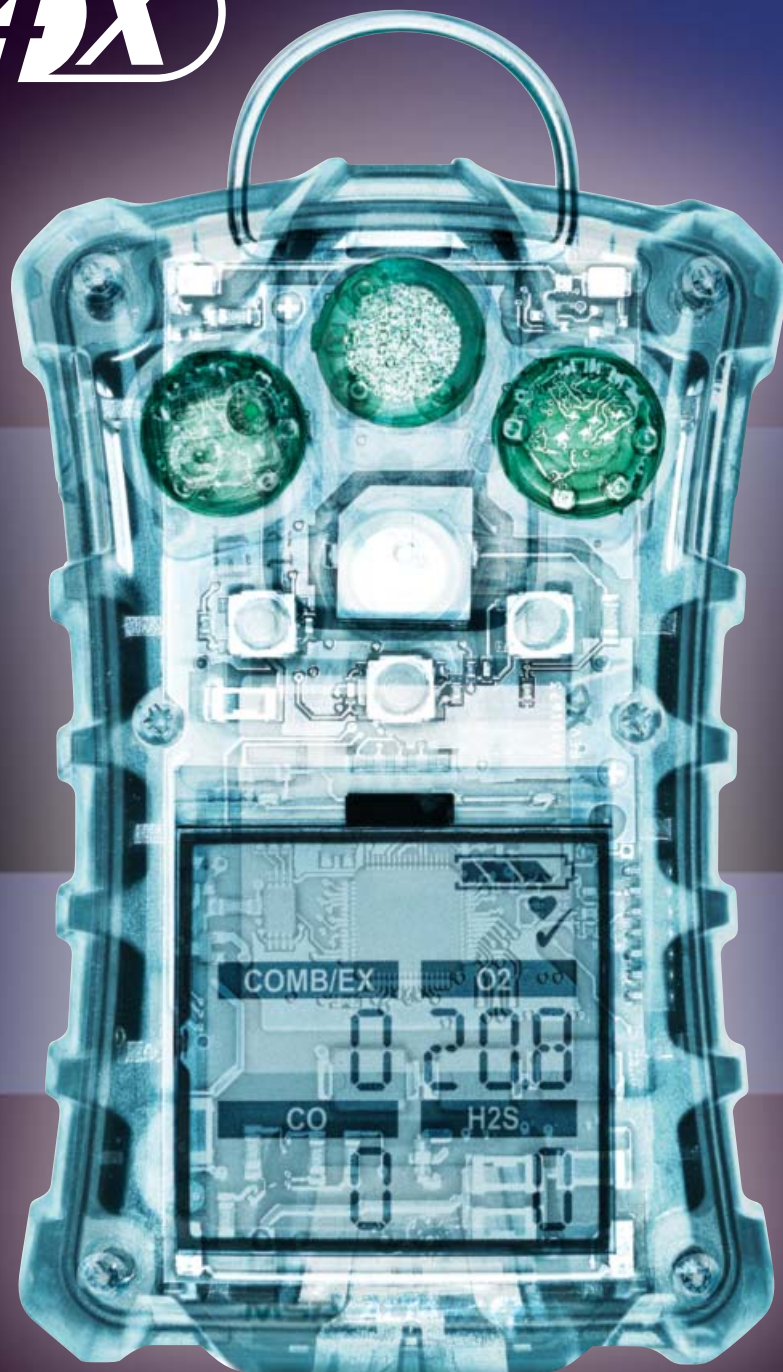

MSA
The Safety Company

IT'S WHAT'S INSIDE THAT COUNTS

OUR VISION OF SAFETY Workers who face potentially hazardous situations deserve the best protection available. At MSA, we work tirelessly to build smarter, better gas detection instruments that people across the world can rely on. To that end, we're proud to introduce the most advanced technology available in any portable gas detector on the market:

the ALTAIR 4X Multigas Detector with XCell Sensor Technology.

Built on Durability

The ALTAIR 4X Multigas Detector for LEL, CO, H₂S and O₂ is as tough and functional as it looks. A rugged housing provides unsurpassed durability, including the ability to survive a 20-foot drop. And with large, glove-friendly buttons and a high-contrast display, the ALTAIR 4X Multigas Detector is easy to operate in any work environment, even low-light conditions.

Powered by Performance

Toughness and durability aren't the whole story. The real strength of the ALTAIR 4X Multigas Detector comes from new sensor technology. MSA XCell Sensors have a typical life of more than four years, double the industry average, and are engineered using MSA's proprietary application-specific integrated circuit (ASIC) design. By miniaturizing sensor controlling electronics and placing them inside the sensor itself, MSA XCell Sensors offer superior stability, accuracy and repeatability.

MSA XCell Sensors are a breakthrough in chemical and mechanical sensor design, enabling faster response and span calibration times. With less time spent on calibration and bump tests, you save calibration gas, maintenance costs and in turn, save money. But most importantly, in your industry, saving seconds on response time can also mean saving lives.

Count on the ALTAIR 4X Detector

Exclusive safety features like MotionAlert™ and InstantAlert™ make the ALTAIR 4X Multigas Detector ideal for applications like confined space entry. The MotionAlert sensor activates when a user becomes disabled and motionless, quickly alerting others to the disabled user's location. And with a simple push of a button, the InstantAlert feature enables users to manually alert others to potentially hazardous situations.

The ALTAIR 4X Multigas Detector outlasts the competition. To prove it, the instrument comes with a full three-year warranty, an entire year longer than the industry average, so that you can depend on the ALTAIR 4X Multigas Detector to withstand the wear and tear that other portable gas detectors can't.

XCell[®]

S E N S O R S

MSA XCell
Combustible Sensor

MSA XCell
CO/H₂S Sensor

MSA XCell
Oxygen Sensor



Adding microelectronics inside the sensors provides more control and higher performance than previous generations



MSA XCell Sensors are a breakthrough in chemical and mechanical sensor design, enabling faster response and span calibration times

THE MSA COMMITMENT FROM THE LATEST IN SENSOR TECHNOLOGY TO INSTRUMENT DESIGN AND MANUFACTURING, MSA HAS THE CAPABILITIES AND KNOWLEDGE TO SUPPORT YOUR PORTABLE GAS DETECTION CHALLENGES.

MSA XCell Technology:

Save Time, Save Money, Save Lives

Built upon years of sensor design experience, MSA is revolutionizing sensor technology with breakthroughs in design that improve performance.

- Sensor response and clear times in less than 15 seconds
- Bump test in less than 15 seconds
- 60-second span calibration time
- Greater signal stability and repeatability under changing or extreme environmental conditions
- Two-tox CO/H2S sensor with virtually no cross-channel interference
- The digital output of the sensors makes them much less susceptible to RF interference

With reliable, extended-life XCell Sensors, there's no need to replace sensors after two years.

- Typical life greater than four years
- Laser-welded sensor housings eliminate opportunities for leaks
- Combustible sensor's proprietary operating mode enhances poison resistance over the sensor's life
- End-of-sensor-life warning gives advanced notice to user, reducing service outages

Technology That's Tough

Life-Saving Performance

- Large buttons and a bright display enable quick and easy operation even while wearing gloves
- If a user becomes disabled due to unforeseen hazards, the MotionAlert sensor will activate after 30 seconds
- The InstantAlert feature enables users to manually alert others of a dangerous situation with the push of a button
- Compatible with Galaxy® Test System
- MSA Link™ Pro and MSA Link Software-ready
- Global approvals for worldwide acceptance

Lasting Durability

- Full three-year warranty supports the entire instrument, including sensors and battery
- Withstands extreme impacts with rugged polycarbonate housing
- Passes 20-ft drop test
- IP67-rated ALTAIR 4X Detector is both dust- and water-tight

Applications

- Oil, gas and petrochemical • Pharmaceutical • Chemical • Confined spaces • Fire service
- Utilities and telecommunications • Municipal works, waste water • Mining



New glow-in-the-dark housing for mining or confined spaces applications

MSA



■ MSA-exclusive feature

Technical Specifications

Gas	Range	Resolution
LEL	0-100%	1%
O ₂	0-30% vol	0.1% vol
CO	0-1999 ppm	1 ppm
H ₂ S	0-200 ppm	1 ppm

Drop test	20 ft
Housing	Rugged rubberized armor
Weight	7.9 oz
Dimensions (L x W x D)	4.4 x 3.0 x 1.31
Audible alarm	>95 dB at 1 ft
Visual alarm	4 ultra-bright LEDs on top and bottom
Vibrating alarm	Standard
MotionAlert & InstantAlert	Optional
Display	High-contrast LCD
Backlight	Adjustable time-out
Battery	Rechargeable li-polymer
Run time	24 hours @ room temperature
Charging time	< 4 hrs
Operating temperature range	-10° C to +40° C
Extended temperature range	-20° C to +50° C
Short period (15 minutes) temperature range	-40° C to +60° C
Humidity	15 – 90% RH non-condensing
Ingress protection	IP67
Data log	(adjustable) 50-hour minimum
Event log	Standard 500 events
Standard warranty	3 years
Extended warranty	Optional 1-year

For additional customized versions and calibration gases, use MSA's ATO ordering sheet or contact MSA Customer Service at 1-800-MSA-2222.

Note: This bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.



ID 0802-50-MC / December 2014
© MSA 2014 Printed in U.S.A.

MSA – The Safety Company
1000 Cranberry Woods Drive
Cranberry Township, PA 16066 USA
Phone 724-776-8600
www.MSAafety.com

U.S. Customer Service Center
Phone 1-800-MSA-INST
Fax 1-800-967-0398

MSA Canada
Phone 1-800-MSA-INST
Fax 1-800-967-0398

MSA Mexico
Phone 01-800-672-7222
Fax 52-44-2227-3943

MSA International
Phone 724-776-8626
Toll Free 1-800-672-7777
FAX 724-741-1553

ALTAIR 4X Detector with 3-year warranty, data logging, charger, calibration cap, and tubing

Approvals

U.S./CAN	ATEX	ANZ	Configuration	Case Color
10107602	10110453	10110447	LEL, O ₂ , CO, H ₂ S	Charcoal
10107603	10110456	10110450	LEL, O ₂ , CO, H ₂ S	Phosphorescent
10110443	10110454	10110448	LEL, O ₂ , CO	Charcoal
10110445	10110457	10110451	LEL, O ₂ , CO	Phosphorescent
10110444	10110455	10110449	LEL, O ₂	Charcoal
10110446	10110458	10110452	LEL, O ₂	Phosphorescent
10148343	—	—	LEL, O ₂ , CO, H ₂ S-LC	Charcoal

ALTAIR 4X Detector, 4-gas, in black case with calibration cylinder and 0.25 lpm regulator

U.S./CAN Approval	Configuration	Case Color
10110488	LEL, O ₂ , CO, H ₂ S	Charcoal

ALTAIR 4X GALAXY GX2 Automated Test System

N. America	EU	UK	AUS	Configuration
10128630	10128639	10128659	10128669	1 cylinder, charging
10128629	10128638	10128658	10128668	Up to 4 cylinders, charging
10128642	10128651	10128661	10128671	1 cylinder, non-charging
10128641	10128640	10128660	10128670	Up to 4 cylinders, non-charging

Calibration Gas

10048280	Gas cylinder (34 l) 1.45% CH ₄ , 15% O ₂ , 60 ppm CO, 20 ppm H ₂ S
10045035	Gas cylinder (54 l) 1.45% CH ₄ , 15% O ₂ , 60 ppm CO, 20 ppm H ₂ S

Replacement Sensors

10106722	XCell Ex Combustible Sensor
10106729	XCell O ₂ Sensor
10106725	XCell CO/H ₂ S Two-tox Sensor
10121213	XCell CO/H ₂ S-LC Two-tox Sensor
10121214	XCell CO H ₂ -RES/H ₂ S Two-tox Sensor
10121215	XCell SO ₂ /H ₂ S-LC Two-tox Sensor
10121217	XCell NO ₂ /CO Two-tox Sensor

Accessories

10152669	ALTAIR Pump Probe (U.S./CAN)
10153039	ALTAIR Pump Probe No Charger (U.S./CAN)
10152668	ALTAIR Pump Probe Euro Charger (ATEX/IEC)
10153040	ALTAIR Pump Probe No Charger (ATEX/IEC)

Approvals (pending)

United States ETL Class I, Div. 1, Groups A,B, C&D Tamb=-40°C to +54°C ETL Class II, Div.1, Groups E,F&G Class III, Div. 1 Tamb=-40°C to +54°C; T4	ATEX II 1G Ex ia IIC T4, -40°C to +60°C, IP67 (Zone 0 with no combustible sensor installed) II 2G Ex ia d IIC T4, -40°C to +60°C, IP67 (Zone 1 with combustible sensor installed)
Canada CSA Class I, Div. 1, Groups A,B,C&D CAN/CSA C22.2 152; 12.13.01-2000 ETL Class II, Div.1, Groups E,F&G Class III, Div. 1 Tamb=-40°C to +54°C; T4	IEC Ex ia IIC T4, -40°C to +60°C (Zone 0 with no combustible sensor installed) Ex ia d IIC T4, -40°C to +60°C (Zone 1 with combustible sensor installed)
Australia / New Zealand Ex ia s IIC T4, -40°C to +60°C, IP67 (Zone 0)	

MSA
The Safety Company