


IP Codes (series 331)

- Level 6: Dust-proof.
No ingress of dust allowed.
- Level 5: Protected against water jets.
Water projected in jets against the enclosure from any direction shall have no harmful effects.

Technical Data

Flatness: 0.3µm/ .000012"
 Parallelism: (2+R/100)µm, R = max. range (mm)
 [.00008" + .00004(R/4)]" R = max range (inch)
 fraction rounded down

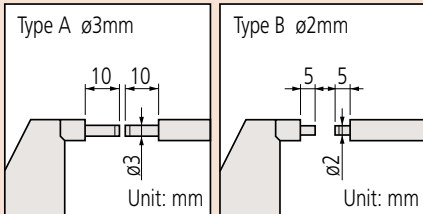

Battery for series 331

SR44 (1 pc), **938882**, for initial operational checks (standard accessory)
 Battery life: Approx. 2.4 years under normal use (for series 331)
 Length standard: Electromagnetic rotary sensor (for series 331)
 Standard accessories: Reference bar, 1 pc (except for measuring range 0-25mm (0-1") models)
 Spanner (301336), 1 pc

Optional accessories


Connecting cables for **series 331**
 1m: **05CZA662**
 2m: **05CZA663**
USB Input Tool Direct
 USB-ITN-B (2m): **06ADV380B**
 Connecting cables for **U-WAVE-T**
02AZD790B 160mm
 For foot switch: **02AZE140B**
 Refer to page B-68 for details.

**Spline Micrometers
 SERIES 331, 111, 131**

- The anvil and spindle are of small diameter for measuring splined shafts, slots, and keyways.
- IP65 water/dust protection (series 331).
- Measuring faces: Carbide
- Equipped with Ratchet Stop for constant measuring force.



331-251-30

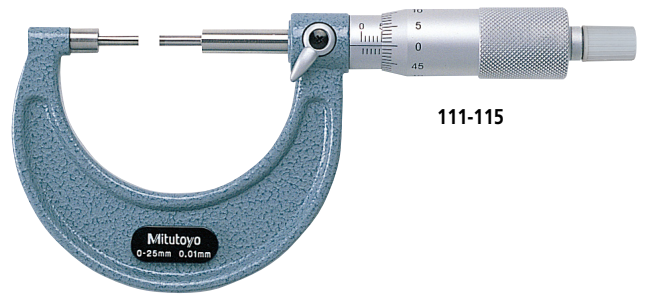

111-115

SPECIFICATIONS

Metric				
Order No.	Range	Resolution	Accuracy*	Remarks
Digimatic (LCD)				
331-251-30	0 - 25mm	0.001mm	±2µm	Type A
331-252-30	25 - 50mm			
331-253-30	50 - 75mm			
331-254-30	75 - 100mm		±3µm	Type B
331-261-30	0 - 25mm			
331-262-30	25 - 50mm			
331-263-30	50 - 75mm	±2µm	Type B	
331-264-30	75 - 100mm			±3µm

* Excluding quantizing error

Inch/Metric				
Order No.	Range	Resolution	Accuracy*	Remarks
Digimatic (LCD)				
331-351-30	0 - 1"	.00005"/ 0.001mm	±.0001"	Type A
331-352-30	1" - 2"			
331-353-30	2" - 3"			
331-354-30	3" - 4"		±.00015"	Type B
331-361-30	0 - 1"			
331-362-30	1" - 2"			
331-363-30	2" - 3"	±.0001"	Type B	
331-364-30	3" - 4"			±.00015"

* Excluding quantizing error

Metric				
Order No.	Range	Graduation	Accuracy	Remarks
Analog				
111-215	0 - 25mm	0.01mm	±3µm	Type B
111-115	0 - 25mm			
111-116	25 - 50mm			
111-117	50 - 75mm		±4µm	Type A
111-118	75 - 100mm			
111-119	100 - 125mm			
111-120	125 - 150mm	±5µm		
111-121	150 - 175mm			
111-122	175 - 200mm			
111-123	200 - 225mm	±6µm		
111-124	225 - 250mm			
111-125	250 - 275mm			
111-126	270 - 300mm			
Mechanical counter model				
131-115	0 - 25mm		±3µm	Type A

Inch				
Order No.	Range	Graduation	Accuracy	Remarks
Analog				
111-166	0 - 1"	.0001"	±.00015"	Type A