

# 1 Technical Data Measurement Microphones

## 1.1 Certified Class 1 Measuring Microphones

	M2340 Class 1 certified with self-examination	M2230 class 1 certified
Scope of delivery	MA230 preamplifier + MC230A microphone capsule	MA220 preamplifier + MC230A microphone capsule
Microphone type	Omnidirectional, condenser free-field microphone with continuous polarization	
Classification according to IEC 61672 and ANSI S1.4	Class 1 certified	
Microphone capsule	½" removable with thread 60UNS2 type WS2F according to IEC 61094-4	
Preamplifier type	MA230	MA220
Self-check	Yes	No

## 1 Technical Data Measurement Microphones

	M2340 Class 1 certified with self-examination	M2230 class 1 certified
<b>Frequency response tolerance typical</b>	$\pm 1 \text{ dB @ } 5 \text{ Hz} - 20 \text{ Hz}$ $\pm 1 \text{ dB @ } >20 \text{ Hz} - 4 \text{ kHz}$ $\pm 1.5 \text{ dB @ } >4 \text{ kHz} - 10 \text{ kHz}$ $\pm 2 \text{ dB @ } >10 \text{ kHz} - 16 \text{ kHz}$ $\pm 3 \text{ dB @ } >16 \text{ kHz} - 20 \text{ kHz}$	
<b>Individual frequency response</b>	Freely available as Excel file: register the microphone on <a href="http://my.nti-audio.com">my.nti-audio.com</a> and contact <a href="mailto:info@nti-audio.com">info@nti-audio.com</a>	
<b>Frequency range</b>	5 Hz – 20 kHz	
<b>Intrinsic noise typical</b>	17 dB(A)	16 dB(A)
<b>Maximum sound pressure level @ distortion factor 3%, 1 kHz</b>	138 dBSPL	137 dBSPL
<b>Sensitivity typical @ 1 kHz</b>	27.5 dBV/Pa $\pm 2 \text{ dB}$ (42 mV/Pa)	

	M2340 Class 1 certified with self-examination	M2230 class 1 certified
Temperature coefficient	< -0.015 dB / °C	
Temperature range	-10°C to +50°C (14°F to 122°F)	
Influence of air pressure	0.005 dB / kPa	
Influence of humidity (non-condensing)	< ±0.05 dB	
Humidity	5% to 90% RH, non-condensing	
Long-term stability	> 250 years / dB	
Power supply	48 VDC phantom power	
Power consumption	0.76 mA typical	2.3 mA typical
Electronic data sheet	NTi Audio ASD according to IEEE P1451.4 V1.0, Class 2, Template 27	
Output impedance	100 Ω symmetrical	
Output connector	balanced 3-pin XLR	
Diameter	20.5 mm (0.8")	

## 1 Technical Data Measurement Microphones

	M2340 Class 1 certified with self-examination	M2230 class 1 certified
Length	154 mm (6.1")	
Weight	100 g, 3.53 oz	
Protection class	IP51	
NTi Audio #	600 040 230	600 040 050

### 1.2 Measuring Microphones

	M2211 frequency response class 1	M2215 for high sound levels, frequency response class 1	M4261 class 2 (Legacy)	M4262 class 2
Includes	MA220 preamplifier + M2211 microphone capsule	MA220 preamplifier + M2215 microphone capsule	M4261 (Legacy) with fixed microphone capsule	M4262 with fixed microphone ECM capsule
Microphone type	Omnidirectional, condenser free-field microphone with continuous polarization		Electret capsule	

	M2211 frequency response class 1	M2215 for high sound levels, frequency response class 1	M4261 class 2 (Legacy)	M4262 class 2
Classification according to IEC 61672 and ANSI S1.4	Frequency response class 1		Class 2	
Microphone capsule	1/2" removable with thread 60UNS2 type WS2F according to IEC 61094-4		1/4" fixed mounted	
Preamplifier type	MA220		-	
Self-check	No			
Frequency response tolerance typical	±1 dB @ 5 Hz – 20 Hz ±1 dB @ >20 Hz – 4 kHz ±1.5 dB @ >4 kHz – 10 kHz ±2 dB @ >10 kHz – 16 kHz ±3 dB @ >16 kHz – 20 kHz		+1/-4.5 dB @ 5 Hz – 20 Hz ±1.5 dB @ >20 Hz – 4 kHz ±3 dB @ >4 kHz – 10 kHz ±45 dB @ >10 kHz – 16 kHz ±5 dB @ >16 kHz – 20 kHz	+1/-5 dB @ 5 Hz – 20 Hz ±1.5 dB @ 20 Hz - 4 kHz ±3 dB @ 4 kHz – 20 kHz

## 1 Technical Data Measurement Microphones

	M2211 frequency response class 1	M2215 for high sound levels, frequency response class 1	M4261 class 2 (Legacy)	M4262 class 2
Individual frequency response freely available as Excel file	Freely available as Excel file: register the microphone on <a href="http://my.nti-audio.com">my.nti-audio.com</a> and contact <a href="mailto:info@nti-audio.com">info@nti-audio.com</a>			
Frequency range	5 Hz – 20 kHz			10 Hz – 30 kHz
Typical sensitivity @ 1 kHz	- 34 dBV/Pa $\pm$ 3 dB (20 mV/Pa)	- 42 dBV/Pa $\pm$ 3 dB (8 mV/Pa)	- 36 dBV/Pa $\pm$ 3 dB (16 mV/Pa)	-36 dBV/Pa $\pm$ 3 dB (16 mV/Pa)
Intrinsic noise typical	21 dB(A) SPL @ 20 mV/Pa	25 dB(A) SPL @ 8 mV/Pa	27 dB(A) SPL @ 16 mV/Pa	32 dB(A) SPL @ 16 mV/Pa
Maximum sound pressure level @ distortion factor 3%, 1 kHz	144 dBSPL	153 dBSPL	142 dBSPL	140 dB SPL
Temperature coefficient	< $\pm$ 0.015 dB / °C		< $\pm$ 0.02 dB / °C	< $\pm$ 0.03 dB / °C
Temperature range	-10°C to +50°C (14°F to 122°F)		0°C to +40°C (32°F to 104°F)	

	M2211 frequency response class 1	M2215 for high sound levels, frequency response class 1	M4261 class 2 (Legacy)	M4262 class 2
Pressure coefficient	0.02 dB / kPa		-0.04 dB / kPa	
Influence of humidity (non-condensing)	< ±0.05 dB		< ±0.4 dB	
Humidity	5% to 90% RH, non-condensing			
Long-term stability	> 250 years / dB		-	
Power supply	48 VDC phantom power			
Power supply current	2.3 mA typical		1.7 mA typical	1.4 mA idle, 5 mA @ clip level
Electronic data sheet	NTi Audio ASD according to IEEE P1451.4 V1.0, Class 2, Template 27			
Output impedance	100 Ω symmetrical			
Output connector	balanced 3-pin XLR			

## 1 Technical Data Measurement Microphones

	M2211 frequency response class 1	M2215 for high sound levels, frequency response class 1	M4261 class 2 (Legacy)	M4262 class 2
<b>Diameter</b>	20.5 mm (0.8")			Housing: 20.5 mm (0.8"), Neck: 7.8 mm (0.3"), Recess for calibrator: 7 mm
<b>Length</b>	150 mm (5.9")			
<b>Weight</b>	100 g, 3.53 oz		83 g, 2.93 oz	83 g, 2.93 oz
<b>Protection class</b>	IP 51			
<b>NTi Audio #</b>	600 040 022	600 040 045	600 040 070	600 040 075

<b>M2914 Low-Noise</b>	
<b>Microphone type</b>	Omnidirectional, pre-polarized condenser, free field microphone
<b>Capsule / transducer</b>	1/2" detachable with 60UNS2 thread, type WS2F according IEC 61094-4 matched with preamplifier
<b>Preamplifier type</b>	MA214

<b>M2914 Low-Noise</b>	
<b>Flatness tolerance bands typical</b>	$\pm 2$ dB @ 10 Hz – 16 kHz $\pm 3$ dB @ 5 Hz – 20 kHz
<b>Typical sensitivity @ 1 kHz</b>	320 mV/Pa
<b>Residual noise floor typical</b>	6.5 dB(A)
<b>Maximum SPL @ THD 3%, 1 kHz, S<sub>1</sub> typical</b>	Peak 103 dB / RMS 100 dB
<b>Temperature coefficient</b>	$< \pm 0.01$ dB / °C
<b>Temperature range</b>	–20°C to +60°C (–4°F to 140°F)
<b>Pressure coefficient</b>	–0.00001 dB/Pa
<b>Humidity</b>	$< 90\%$ R.H., non-condensing
<b>Power supply</b>	ICP
<b>Power supply current</b>	4 – 20 mA typical

M2914 Low-Noise	
Output impedance	< 100 $\Omega$
Connector	BNC
Diameter	12.7 mm (0.5"), protection grid 13.2 mm (0.52")
Length	135 mm (5.3")
Weight	250 g (8.8 oz)
Windscreen diameter	50 mm (2")
NTi Audio #	600 040 240

### 1.3 Technical Data Microphone Preamplifiers

	MA230	MA220
Microphone preamplifier	Compatible with 1/2" microphone capsules type WS2F according to IEC61094-4	
Typical Frequency range	1.3 Hz – 50.0 kHz	2.5 Hz – 50 kHz
Frequency Response flatness	$\pm 0.2$ dB, 10 Hz - 20 kHz	$\pm 0.2$ dB, 10 Hz - 20 kHz

	MA230	MA220
<b>Phase linearity</b>	$<\pm 5^\circ @ 20 \text{ Hz} - 20 \text{ kHz}$	$<\pm 10^\circ @ 20 \text{ Hz} - 20 \text{ kHz}$
<b>Intrinsic noise typical</b>	$2.4 \mu\text{V(A)} @ C_{in} 15 \text{ pF} \triangleq 9.1 \text{ dBA} @ 42 \text{ mV/Pa}$	$1.6 \mu\text{V(A)} @ C_{in} 18 \text{ pF} \triangleq 5.6 \text{ dBA} @ 42 \text{ mV/Pa}$
<b>Maximum output voltage</b>	$22 \text{ Vpp} \triangleq 7.78 \text{ Vrms} \triangleq 139.3 \text{ dB SPL} @ 42 \text{ mV/Pa}$	$21 \text{ Vpp} \triangleq 7.4 \text{ Vrms} \triangleq 138.9 \text{ dB SPL} @ 42 \text{ mV/Pa}$
<b>Electronic data sheet</b>	<ul style="list-style-type: none"> <li>• Contains calibration data</li> <li>• Original NTi Audio sensitivity = 4.9 V/Pa</li> <li>• Save and read data with M-Series Microphones Analyzer</li> <li>• NTi Audio ASD according to IEEE P1451.4 V1.0, class 2, template 27</li> </ul>	
<b>Self-check</b>	Yes	No
<b>Humidity</b>	5% to 90% RH, non-condensing	
<b>Power supply</b>	48 VDC phantom power	
<b>Power supply current</b>	0.76 mA typical	2.3 mA typical
<b>Electronic data sheet</b>	NTi Audio ASD according to IEEE P1451.4 V1.0, class 2, template 27	
<b>Output impedance</b>	100 $\Omega$ symmetrical	
<b>Output connector</b>	balanced 3-pin XLR	

## 1 Technical Data Measurement Microphones

	MA230	MA220
Diameter	20.5 mm (0.8")	
Length	154 mm (6.1")	
Weight	100 g, 3.53 oz	
Protection class	IP51	
NTi Audio #	600 040 200	600 040 050

### 1.4 Outdoor Measurement Microphones

#### 1.4.1 WP40 Specifications / WP62 Specifications

	M2230 + WP40-90	M2340 + WP40-90	M4261 (Legacy) + WP62-90	M4262 + WP62-90
Classification with XL2 or XL3 according to IEC 61672 and ANSI S1.4	Class 1	Class 1	Meets the Class 2 Frequency Response requirements	Meets the Class 2 Frequency Response requirements
Certifications	PTB	LNE, PTB, METAS	-	-

	M2230 + WP40-90	M2340 + WP40-90	M4261 (Legacy) + WP62-90	M4262 + WP62-90
Self-Check (CIC)	-	With XL2, with XL3 only with API	-	-
Environmental Protection	Rainfall with Wind Proofing under extreme conditions: <b>Test A – PASSED – Duration 4 hours:</b> <ul style="list-style-type: none"> <li>Rainfall intensity Rate/ Distribution: 1200 mm/h, Uniform water coverage from 45° to WP40</li> <li>Wind Speed / Direction: 30kmh (18.6 mph) / 90 ° to WP40</li> </ul> <b>Test B – PASSED – Duration 40 minutes:</b> <ul style="list-style-type: none"> <li>Rainfall intensity Rate/ Distribution: 1200 mm/h, Uniform water coverage from 45° to WP40</li> <li>Wind Speed / Direction: 110kmh (68.4 mph) / 90 ° to WP40</li> </ul>			
Mounting	Standard 3/8" tripod adapter included			
Windscreen Diameter	90 mm (3.54")			
Housing Diameter	36 mm (1.41")			

## 1 Technical Data Measurement Microphones

	M2230 + WP40-90	M2340 + WP40-90	M4261 (Legacy) + WP62-90	M4262 + WP62-90
<b>Housing Length</b>	366 mm (14.4")			
<b>Weight (incl Micro- phone)</b>	300g (10.6 oz)			
<b>NTi Audio Article #</b>	600 040 050 + 600 040 140	600 040 230 + 600 040 140	600 040 070 + 600 040 140	600 040 075 + 600 040 140
<b>Optional Pole Mount Adapter</b>	<ul style="list-style-type: none"> <li>Pole Mount Adapter PM 1" for Pole Diameter 25–33 mm (1–1.3") NTi Audio # 600 040 067</li> <li>Pole Mount Adapter PM 1 1/4" for Pole Diameter 32–44 mm (1.25–1.75") NTi Audio # 600 040 068</li> </ul>			


## 1.4.2 WP30 / WP61 Specifications (Legacy)

	M2230 + WP30-90	M2340 + WP30-90	M4261 (Legacy) + WP61
Classification with XL2 or XL3 according to IEC 61672 and ANSI S1.4	Class 1	Class 1	Meets the Class 2 Frequency Response requirements
Certifications	PTB	LNE, PTB	-
Self-Check (CIC)	-	With XL2, with XL3 only with API	-
Mounting	Standard 3/8" tripod adapter included		
Windscreen Diameter	90 mm (3.54")		
Housing Diameter	36 mm (1.41")		
Housing Length	363 mm (14.3")		
Weight (incl Microphone)	300g (10.6 oz)		

## 1 Technical Data Measurement Microphones

	<b>M2230 + WP30-90</b>	<b>M2340 + WP30-90</b>	<b>M4261 (Legacy) + WP61</b>
<b>NTI Audio Article #</b>	600 040 050 + 600 040 060	600 040 230 + 600 040 060	600 040 070 + 600 040 060
<b>Optional Pole Mount Adapter</b>	<ul style="list-style-type: none"> <li>• Pole Mount Adapter PM 1" for Pole Diameter 25–33 mm (1–1.3") NTi Audio # 600 040 067</li> <li>• Pole Mount Adapter PM 1 1/4" for Pole Diameter 32–44 mm (1.25–1.75") NTi Audio # 600 040 068</li> </ul>		

## 1.5 Typical Frequency Response of Measurement Microphones

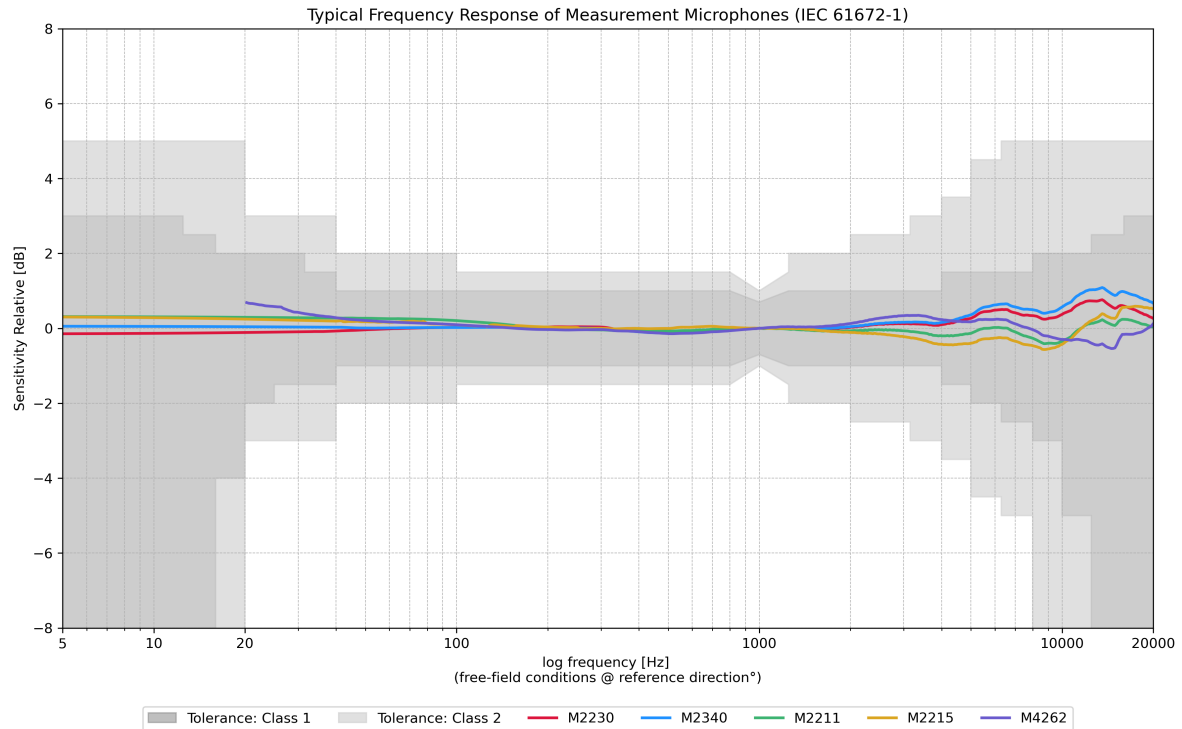



Our Class 2 microphones have a flat frequency response under standard conditions (1013.25 mbar, 23°C, 50% RH), just like our Class 1 microphones. However, their sensitivity may vary more with changes in these environmental conditions compared to the stricter limits of Class 1. Please keep this in mind when choosing the right microphone for your needs.

Here are NtAudio’s recommendations for each application:

Class / Type	Microphone Model	Applications
Class 1 / Type 1 Certified	M2230 (1/2" detachable)	<ul style="list-style-type: none"><li>• Noise Measurements</li><li>• Building Acoustics</li><li>• Legal Applications</li></ul>
	M2340 (1/2" detachable)	<ul style="list-style-type: none"><li>• Noise Monitoring with system self-test (CIC)</li><li>• Legal Applications</li></ul>

Class / Type	Microphone Model	Applications
<b>Class 1 / Type 1</b>	M2211 (1/2" detachable)	<ul style="list-style-type: none"> <li>• Noise Measurements</li> <li>• Cinema Calibration</li> <li>• PA Rental</li> </ul>
	M2215 (1/2" detachable)	<ul style="list-style-type: none"> <li>• High-Level Noise Measurements</li> </ul>
	M2914 (1/2")	<ul style="list-style-type: none"> <li>• Low Noise Measurement</li> </ul>
<b>Class 2 / Type 2</b>	M2010 (1/2" detachable)	<ul style="list-style-type: none"> <li>• Industrial Manufacturing</li> <li>• Quality Control</li> <li>• R&amp;D</li> </ul>
	M2015 (1/2" detachable)	<ul style="list-style-type: none"> <li>• Industrial Manufacturing</li> <li>• Quality Control</li> <li>• High-Level Measurements</li> </ul>
	M4262 (1/4" fixed)	<ul style="list-style-type: none"> <li>• Live Sound</li> <li>• Installations</li> <li>• Broadcast</li> <li>• Occupational Health</li> </ul>

### 1.6 Free Field - Pressure Correction Factors

If a measurement microphone is located in a free-field environment, then the microphone capsule acts like a reflector at high frequencies, as the sound pressure increases in front of the membrane. M2211, M2215, M2230, M2340, M4261 (Legacy) and M4262 are free-field equalized measurement microphones, they compensate for the increased pressure internally. The calibration of the measurement microphones M2230 and M2340 with the B&K 4226 requires the accessory Adapter Ring MXR01, NTi Audio # 600 040 105. Please note, never touch the diaphragm of the measurement microphone capsule.

The calibrator no longer offers free-field conditions. Therefore, the free-field equalization of the microphone must be compensated. This needs to be considered prior to the calibration. The correction value needs to be added to the pressure response of the microphone.

Example:

- During the calibration, the XL2 or XL3 measures the sound level in the calibrator. If the B&K 4226 calibrator is used and is set to 16 kHz, then the XL2 or XL3 + M2230 reads just 86.7 dBA.
- The free-field sound level is calculated by summing the XL2 or XL3 measurement value and the correction value ( $86.7 \text{ dB} + 7.3 \text{ dB} = 94.0 \text{ dB}$ ).

The following corrections apply with the B&K 4226 calibrator.

Nominal Frequency [Hz]	M2230, M2340 with MXR01 Adapter [dB]	M2211 [dB]	M2215 [dB]	Measurement Uncertainty U [dB]
31.5	-0.3	-0.2	0.0	0.3
63	0.0	0.0	0.0	0.3
125	-0.2	-0.1	-0.1	0.3
250	-0.2	-0.1	-0.1	0.3
500	-0.2	-0.1	-0.1	0.3
1000	0.0	0.0	0.0	0.3
2000	0.1	0.1	0.0	0.3
4000	0.7	0.7	0.4	0.3
8000	2.7	4.5	4.7	0.4
12500	7.2	5.8	6.1	0.7
16000	7.3	7.9	7.9	0.8


Correction values for other calibrators for M2230 and M2340.

Calibration	
Free-field correction	<ul style="list-style-type: none"><li>• Class 1 sound calibrator 94 dB (NTi Audio #: 600 000 402): M2215 / M2211: -0.12 dB;</li><li>• Class 1 sound calibrator 94 dB (NTi Audio #: 600 000 402) with 1/4" calibrator adapter NTi (Audio #: 600 000 404):<ul style="list-style-type: none"><li>• M4260 (Legacy): +0.10 dB;</li><li>• M4261 (Legacy): +0.20 dB;</li><li>• M4262: +0.10 dB.</li></ul></li></ul>

Calibration						
Windscreen correction @ 1 kHz	M2230 / M2340 Configuration	Sound Calibrator				
		NTi CAL200	B&K 4231	Nor 1251	Nor 1256	Cirrus CR:515
	No Accessory; Windscreen 90mm <sup>1</sup> ;					
	Windscreen 50mm <sup>1</sup> ;	93.88 /	93.85 /	93.85 /	93.85 /	93.70 /
	WP40 Community <sup>1</sup> (horizontal);	-0.12	-0.15	-0.15	-0.15	-0.30
	WP40 Aircraft <sup>1</sup> (vertical).					
	WP30 vertical (Legacy)	93.69 / -0.31	93.66 / -0.34	93.66 / -0.34	93.66 / -0.34	93.51 / -0.49
	WP30 horizontal (Legacy)	93.69 / -0.31	93.66 / -0.34	93.66 / -0.34	93.66 / -0.34	93.51 / -0.49
Manufacturer calibration	<ul style="list-style-type: none"> <li>Recommended calibration interval: 1 year;</li> <li>Calibration certificate for a new sound level meter is optionally available.</li> </ul>					



<sup>1</sup>All required additional correction is handled by the instrument.

### 1.7 Free-field and Diffuse-field Sensitivity of M2230 and M2340

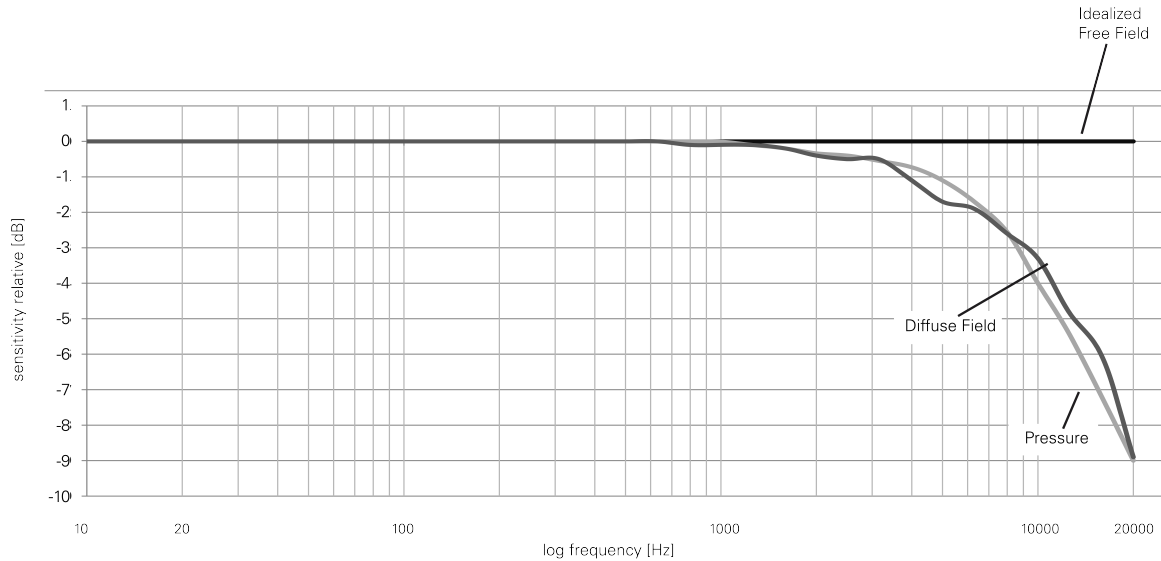

## 1.8 Spectral Correction for horizontal and vertical Sound Incidents using the Outdoor Microphone

The outdoor microphone M2230-WP fulfills Class 1 requirements of IEC 61672 and ANSI S1.4 for vertical sound incidence. For compliance with horizontal sound incidence a spectral correction is employed in the associated Sound Level Meter.

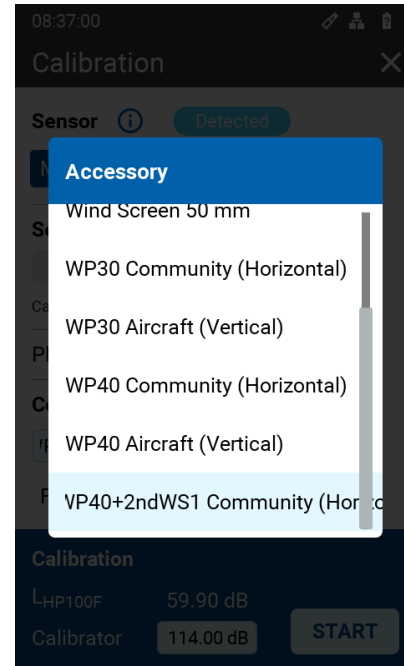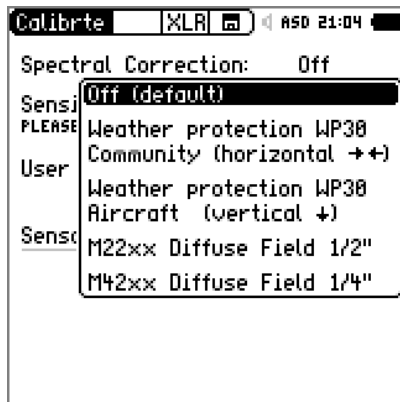

## 1 Technical Data Measurement Microphones

Nominal Frequency [Hz]	WP40 Weather Protection [dB] (Horizontal)		WP40 Weather Protection [dB] (Vertical)		WP40 WS1 Secondary Windshield [dB] (Horizontal)	
	1/3 <sup>rd</sup> Octave	1/1 Octave	1/3 <sup>rd</sup> Octave	1/1 Octave	1/3 <sup>rd</sup> Octave	1/1 Octave
< 800	0.00	0.00	0.00	0.00	0.15	0.15
800	0.06	0.15	-0.31	-0.35	0.37	0.56
1000	0.13		-0.37		0.56	
1250	0.25		-0.39		0.81	
1600	0.47	0.86	-0.28	0.04	1.20	1.65
2000	0.80		0.00		1.65	
2500	1.32		0.40		2.21	
3150	2.05	2.79	0.70	0.81	2.92	3.79
4000	2.88		0.82		3.79	
5000	3.44		0.92		4.45	
6300	3.70	3.69	0.81	0.62	4.68	5.03
8000	3.80		0.61		5.03	
10000	3.57		0.45		4.74	

Nominal Frequency [Hz]	WP40 Weather Protection [dB] (Horizontal)		WP40 Weather Protection [dB] (Vertical)		WP40 WS1 Secondary Windshield [dB] (Horizontal)	
	1/3 <sup>rd</sup> Octave	1/1 Octave	1/3 <sup>rd</sup> Octave	1/1 Octave	1/3 <sup>rd</sup> Octave	1/1 Octave
12500	4.94	6.18	1.85	3.98	5.31	5.59
16000	6.72		4.31		5.59	
20000	6.87		5.79		5.63	

Nominal Frequency [Hz]	WP30 Weather Protection [dB] (Legacy)		WP61 Weather Protection [dB] (Legacy)	
	1/3 <sup>rd</sup> Octave	1/1 Octave	1/3 <sup>rd</sup> Octave	1/1 Octave
< 800	0.0	0.0	0.0	0.0
800	0.0	0.0	0.0	0.0
1000	0.0		0.0	
1250	0.1		0.0	
1600	0.2	0.4	0.2	0.4
2000	0.3		0.3	
2500	0.7		0.8	

## 1 Technical Data Measurement Microphones

Nominal Frequency [Hz]	WP30 Weather Protection [dB] (Legacy)		WP61 Weather Protection [dB] (Legacy)	
	1/3 <sup>rd</sup> Octave	1/1 Octave	1/3 <sup>rd</sup> Octave	1/1 Octave
<b>3150</b>	1.3	2.0	1.4	2.0
<b>4000</b>	2.0		2.1	
<b>5000</b>	2.7		2.5	
<b>6300</b>	2.9	3.4	2.3	2.5
<b>8000</b>	3.3		2.4	
<b>10000</b>	3.9		2.8	
<b>12500</b>	4.6	5.9	3.0	3.0
<b>16000</b>	6.4		3.1	
<b>20000</b>	6.8		3.1	