



Outstanding performance for dual view inspection


6 mm is the most popular size probe of video scopes for the reasons of best developed optical technology.

The new 6 mm dual camera tip equipped with enhanced LEDs that provide 30% up illumination than conventional probe. 1 second switch between front/side views along with so sacrificed image quality is now presented!

Crisp high resolution image quality output

2560*1440 high resolution images recorded on both dual cameras. The side view camera is fine tuned to 7 mm near focal length that especially practical to tube wall side defects inspection.

- FOV: front & side camera 95°
- DOF: front camera 8 mm^{~∞}/ side camera 7 mm^{~∞}

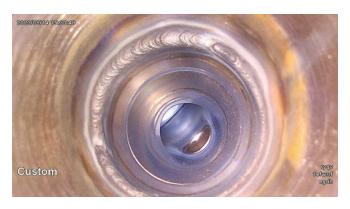



Available on the X2000 & X750 system

High-resolution images and videos. Great mobility. Outstanding flexibility. Stunning results.



Rugged & Durability

- IP67 waterproof
- 100°C resist & High temperature warning
- Unyielding to scratches and corrosion







Sensitive mechanical control articulation

Full way articulation with lock design, mechanic wiring joystick brings you instant feedback and precise angle control.

21.5 mm short tip length and bending radius make your surrounding inspection job extremely comfortable and efficiently.